

6PT Flank Impact Sockets

CR-MO DIN 3121



METRIC Black Phosphate Finished

DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (g)
3/8"	KABA1207	7	30	15
3/8"	KABA1208	8	30	15
3/8"	KABA1209	9	30	15
3/8"	KABA1210	10	30	15
3/8"	KABA1211	11	30	15
3/8"	KABA1212	12	30	15
3/8"	KABA1213	13	30	15
3/8"	KABA1214	14	30	15
3/8"	KABA1215	15	30	15
3/8"	KABA1216	16	30	15
3/8"	KABA1217	17	30	15
3/8"	KABA1218	18	30	15
3/8"	KABA1219	19	30	15
3/8"	KABA1220	20	30	15
3/8"	KABA1221	21	30	15
3/8"	KABA1222	22	30	15

1/2"	KABA1608	8	38	25
1/2"	KABA1609	9	38	25
1/2"	KABA1610	10	38	25
1/2"	KABA1611	11	38	25
1/2"	KABA1612	12	38	25
1/2"	KABA1613	13	38	25
1/2"	KABA1614	14	38	25
1/2"	KABA1615	15	38	25
1/2"	KABA1616	16	38	25
1/2"	KABA1617	17	40	20
1/2"	KABA1618	18	40	20
1/2"	KABA1619	19	40	20
1/2"	KABA1620	20	40	20
1/2"	KABA1621	21	40	20
1/2"	KABA1622	22	40	20
1/2"	KABA1623	23	42	15
1/2"	KABA1624	24	42	15
1/2"	KABA1625	25	42	15
1/2"	KABA1626	26	42	15
1/2"	KABA1627	27	42	15
1/2"	KABA1628	28	45	10
1/2"	KABA1629	29	45	10
1/2"	KABA1630	30	46	10
1/2"	KABA1632	32	46	5
1/2"	KABA1633	33	46	5
1/2"	KABA1634	34	46	5
1/2"	KABA1636	36	50	3
1/2"	KABA1638	38	50	3
1/2"	KABA1641	41	50	3

3/4"	KABA2417	17	50	5
3/4"	KABA2419	19	50	5
3/4"	KABA2421	21	50	5
3/4"	KABA2422	22	50	5
3/4"	KABA2423	23	50	5
3/4"	KABA2424	24	50	5
3/4"	KABA2426	26	50	5
3/4"	KABA2427	27	50	5
3/4"	KABA2428	28	50	5
3/4"	KABA2429	29	53	5
3/4"	KABA2430	30	53	5
3/4"	KABA2432	32	53	5
3/4"	KABA2433	33	55	5
3/4"	KABA2434	34	55	5
3/4"	KABA2435	35	55	5
3/4"	KABA2436	36	55	2
3/4"	KABA2438	38	57	2
3/4"	KABA2441	41	57	2
3/4"	KABA2446	46	62	2

1"	KABA3219	19	57	2
1"	KABA3221	21	57	2
1"	KABA3222	22	57	2
1"	KABA3223	23	57	2
1"	KABA3224	24	57	2
1"	KABA3225	25	57	2
1"	KABA3226	26	57	2
1"	KABA3227	27	57	2
1"	KABA3228	28	57	2
1"	KABA3229	29	57	2
1"	KABA3230	30	62	2
1"	KABA3232	32	62	2
1"	KABA3233	33	62	2
1"	KABA3234	34	62	2
1"	KABA3235	35	62	2
1"	KABA3236	36	62	2
1"	KABA3238	38	66	2
1"	KABA3241	41	66	2
1"	KABA3242	42	66	2
1"	KABA3246	46	70	2
1"	KABA3250	50	70	2
1"	KABA3252	52	75	2
1"	KABA3255	55	82	2
1"	KABA3258	58	82	2
1"	KABA3260	60	85	2
1"	KABA3263	63	85	2
1"	KABA3265	65	85	2
1"	KABA3270	70	90	2
1"	KABA3275	75	90	2
1"	KABA3280	80	90	1
1"	KABA3285	85	108	1
1"	KABA3290	90	108	1
1"	KABA3295	95	108	1



25mm sq.


6PT Flank Impact Sockets

CR-MO DIN 3121



METRIC Black Phosphate Finished

DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (g)
1-1/2"	KABA4841	41	80	2
1-1/2"	KABA4846	46	84	2
1-1/2"	KABA4850	50	87	2
1-1/2"	KABA4855	55	90	2
1-1/2"	KABA4860	60	92	2
1-1/2"	KABA4865	65	95	2
1-1/2"	KABA4870	70	100	2
1-1/2"	KABA4875	75	103	1
1-1/2"	KABA4880	80	110	1
1-1/2"	KABA4885	85	118	1
1-1/2"	KABA4890	90	118	1
1-1/2"	KABA4895	95	118	1
1-1/2"	KABA48A0	100	125	1
1-1/2"	KABA48A5	105	125	1
1-1/2"	KABA48B0	110	125	1
1-1/2"	KABA48B5	115	135	1
1-1/2"	KABA48C0	120	135	1
2-1/2"	KABA8075	75	140	1
2-1/2"	KABA8080	80	140	1
2-1/2"	KABA8085	85	140	1
2-1/2"	KABA8090	90	145	1
2-1/2"	KABA8095	95	145	1
2-1/2"	KABA80A0	100	150	1
2-1/2"	KABA80A5	105	155	1
2-1/2"	KABA80B0	110	160	1
2-1/2"	KABA80B5	115	165	1
2-1/2"	KABA80C0	120	170	1

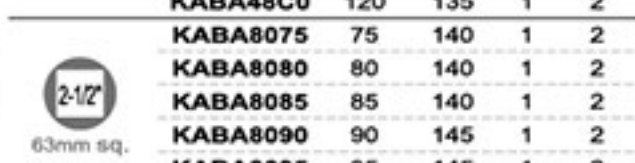

63mm sq.

8PCS

3/8" DR. 6PT Impact Socket Rail Set



Black Phosphate Finished

ITEM NO.	CONTENTS
GDAG0801	KABA1208-1219 8, 10, 11, 12, 13, 14, 17, 19 mm

12PCS

3/8" DR. 6PT Impact Socket Rail Set



Black Phosphate Finished

ITEM NO.	CONTENTS
GDAG1201	KABA1208-1219 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm

6PT Flank Impact Sockets

CR-MO DIN 3121



SAE Black Phosphate Finished

DRIVE	ITEM NO.	SIZE (inch)	L (mm)	Weight (g)
1/2"	KBBA1610	5/16	38	25
1/2"	KBBA1612	3/8	38	25
1/2"	KBBA1614	7/16	38	25
1/2"	KBBA1616	1/2	38	25
1/2"	KBBA1618	9/16	38	25
1/2"	KBBA1620	5/8	38	20
1/2"	KBBA1622	11/16	38	20
1/2"	KBBA1624	3/4	38	15
1/2"	KBBA1626	13/16	38	15
1/2"	KBBA1628	7/8	38	15
1/2"	KBBA1630	15/16	38	10
1/2"	KBBA1632	1	38	10
1/2"	KBBA1634	1-1/16	40	10
1/2"	KBBA1636	1-1/8	40	10
1/2"	KBBA1638	1-3/16	40	10
1/2"	KBBA1640	1-1/4	40	5

6PT Flank Deep Impact Sockets

CR-MO DIN 3121



METRIC Black Phosphate Finished

DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (g)
3/8"	KABE1208	8	65	10
3/8"	KABE1209	9	65	10
3/8"	KABE1210	10	65	10
3/8"	KABE1211	11	65	10
3/8"	KABE1212	12	65	10
3/8"	KABE1213	13	65	10
3/8"	KABE1214	14	65	10
3/8"	KABE1215	15	65	10
3/8"	KABE1216	16	65	10
3/8"	KABE1217	17	65	10
3/8"	KABE1218	18	65	10
3/8"	KABE1219	19	65	10
3/8"	KABE1220	20	65	5
3/8"	KABE1221	21	65	5
3/8"	KABE1222	22	65	5
1/2"	KABE1608	8	78	10
1/2"	KABE1609	9	78	10
1/2"	KABE1610	10	78	10
1/2"	KABE1611	11	78	10
1/2"	KABE1612	12	78	10
1/2"	KABE1613	13	78	10
1/2"	KABE1614	14	78	10
1/2"	KABE1615	15	78	10
1/2"	KABE1616	16	78	10
1/2"	KABE1617	17	78	10
1/2"	KABE1618	18	78	10
1/2"	KABE1619	19	78	10
1/2"	KABE1620	20	78	10
1/2"	KABE1621	21	78	10
1/2"	KABE1622	22	78	10
1/2"	KABE1623	23	78	10
1/2"	KABE1624	24	78	10
1/2"	KABE1625	25	78	10
1/2"	KABE1626	26	78	10
1/2"	KABE1627	27	78	8
1/2"	KABE1628	28	78	8
1/2"	KABE1629	29	78	8
1/2"	KABE1630	30	78	5
1/2"	KABE1632	32	78	5
1/2"	KABE1633	33	78	5
1/2"	KABE1634	34	78	5
1/2"	KABE1636	36	78	5
1/2"	KABE1638	38	78	4
1/2"	KABE1641	41	78	3
3/4"	KABE2419	19	90	5
3/4"	KABE2421	21	90	5
3/4"	KABE2422	22	90	5
3/4"	KABE2423	23	90	5
3/4"	KABE2424	24	90	5
3/4"	KABE2426	26	90	5
3/4"	KABE2427	27	90	5
3/4"	KABE2428	28	90	5
3/4"	KABE2429	29	90	5
3/4"	KABE2430	30	90	2
3/4"	KABE2432	32	90	2
3/4"	KABE2433	33	90	2
3/4"	KABE2434	34	90	2
3/4"	KABE2435	35	90	2

6PT Flank Deep Impact Sockets

CR-MO DIN 3121



SAE Black Phosphate Finished

DRIVE	ITEM NO.	SIZE (inch)	L (mm)	Weight (g)
1/2"	KBBE1610	5/16	78	10
1/2"	KBBE1612	3/8	78	10
1/2"	KBBE1614	7/16	78	10
1/2"	KBBE1616	1/2	78	10
1/2"	KBBE1618	9/16	78	10
1/2"	KBBE1620	5/8	78	10
1/2"	KBBE1622	11/16	78	10
1/2"	KBBE1624	3/4	78	10
1/2"	KBBE1626	13/16	78	10
1/2"	KBBE1628	7/8	78	10
1/2"	KBBE1630	15/16	78	10
1/2"	KBBE1632	1	78	10
1/2"	KBBE1634	1-1/16	78	8
1/2"	KBBE1636	1-1/8	78	8
1/2"	KBBE1638	1-3/16	78	5
1/2"	KBBE1640	1-1/4	78	5

1" DR. Square Budd Wheel Impact Sockets (4PT) (CR-MO) (DIN 3121)

DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
1"	KABM3217	17	57	2	16
1"	KABM3219	19	57	2	16
1"	KABM3221	21	57	2	16

Impact Universal Sockets (CR-MO) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/8"	KABG1211	11	59	15	120
3/8"	KABG1212	12	59	15	120
3/8"	KABG1213	13	59	15	120
3/8"	KABG1214	14	59	15	120
3/8"	KABG1216	16	59	5	40
3/8"	KABG1217	17	59	5	40
3/8"	KABG1218	18	59	5	40
3/8"	KABG1219	19	59	5	40
3/8"	KABG1221	21	59	5	40
3/8"	KABG1222	22	59	5	40
1/2"	KABG1610	10	67	5	40
1/2"	KABG1611	11	67	5	40
1/2"	KABG1612	12	67	5	40
1/2"	KABG1615	15	67	5	40
1/2"	KABG1616	16	67	5	40
1/2"	KABG1622	22	67	5	40



1/2" DR. Star Impact Sockets (CR-MO) (DIN 3121)

DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
1/2"	KABK1610	E10	38	25	150
1/2"	KABK1612	E12	38	25	150
1/2"	KABK1614	E14	38	25	150
1/2"	KABK1616	E16	38	25	150
1/2"	KABK1618	E18	38	25	150
1/2"	KABK1620	E20	38	20	120
1/2"	KABK1624	E24	40	15	120

7PCS 1/2" DR. Star Impact Socket Rail Set



ITEM NO.	CONTENTS	Weight (kg)	Weight (lb)
GDAG0701	7 KABK1610-1624 E10, E12, E14, E16, E18, E20, E24	10 (SET)	

Impact Universal Joint (CR-MO) (DIN 3121) (ISO 1174) (ASME B107.110)



- Provides 360 degrees of rotation at up to a 30 degree angle from vertical
- Metal ring improves torque bearing capacity, durability and safety

DRIVE	ITEM NO.	L (mm)	Type	Weight (kg)	Weight (lb)
3/8"	KACN120B	48	Ball	15	240
1/2"	KACN160B	62	Ball	15	120
1/2"	KACN161B	64	Ball	15	120
3/4"	KACN240P	93	Pin Hole	4	40
1"	KACN320P	110	Pin Hole	1	8

Impact Bit Holders (CR-MO)



ITEM NO.	DRIVE (inch)	Hex Shank (mm)	L (mm)	Weight (kg)	Weight (lb)
KADC1208	3/8	1/4"	46	20	320
KADC1210	3/8	5/16"	46	20	320
KADC1608	1/2	1/4"	48	15	240
KADC1610	1/2	5/16"	48	15	240

Impact Adapter (CR-MO) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
1"	KACP3248	1-1/2"(F) x 1-1/2"(M)	90	2	16
1-1/2"	KACP4880	1-1/2"(F) x 2-1/2"(M)	120	2	4

Impact Adapter (CR-MO) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/8"	KACA1208	3/8"(F) x 1/4"(M)	25	20	360
3/8"	KACA1216	3/8"(F) x 1/2"(M)	33	10	180
1/2"	KACA1612	1/2"(F) x 3/8"(M)	36	20	160
1/2"	KACA1624	1/2"(F) x 3/4"(M)	44	20	160
3/4"	KACA2416	3/4"(F) x 1/2"(M)	58	5	50
3/4"	KACA2432	3/4"(F) x 1"(M)	58	5	50
1"	KACA3224	1"(F) x 3/4"(M)	70	2	16
1-1/2"	KACA4832	1-1/2"(F) x 1"(M)	100	2	8

Quick Change Impact Adapter (CR-V) (ASME B107.4)



- Made of tempered and hardened Chrome Vanadium Alloy Steel
- Heavy duty construction design provides maximum strength and durability
- Quick-release chuck with knurled sleeve for fast and easy bit changes
- Hexagonal adapter securely holds any type of 1/4" hex shank bit
- Ideal for converting an air or power impact wrench into a screwdriver or drill

ITEM NO.	DRIVE (inch)	Hex Shank (mm)	L (mm)	Weight (kg)	Weight (lb)
KADD1208	3/8	1/4"	40	44	88
KADD1608	1/2	1/4"	45	44	88



Star Bit Impact Sockets (SNCM+V) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/8"	KADA1220	T20	52	25	200
3/8"	KADA1225	T25	52	25	200
3/8"	KADA1227	T27	52	25	200
3/8"	KADA1230	T30	52	25	200
3/8"	KADA1240	T40	52	25	200
3/8"	KADA1245	T45	52	25	200
3/8"	KADA1250	T50	52	25	200
3/8"	KADA1625	T25	60	25	200
1/2"	KADA1627	T27	60	25	200
1/2"	KADA1630	T30	60	25	200
1/2"	KADA1640	T40	60	25	200
1/2"	KADA1645	T45	60	25	200
1/2"	KADA1650	T50	60	25	200
1/2"	KADA1655	T55	60	25	200
1/2"	KADA1660	T60	60	25	200
1/2"	KADA1670	T70	60	25	200

3/4" DR. Star Bit Impact Sockets (CR-MO) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/4"	KADA2470	T70	105	5	40
3/4"	KADA2480	T80	105	5	40
3/4"	KADA2490	T90	105	5	40
3/4"	KADA24A0	T100	105	5	40

7PCS 3/8" DR. Star Bit Impact Socket Rail Set



ITEM NO.	CONTENTS	Weight (kg)	Weight (lb)
GDAG0703	7 KADA1220-1250 T20, T25, T27, T30, T40, T45, T50	15 (SET)	

Hex Bit Impact Sockets (SNCM+V) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/8"	KADH1203	3	52	25	200
3/8"	KADH1204	4	52	25	200
3/8"	KADH1205	5	52	25	200
3/8"	KADH1206	6	52	25	200
3/8"	KADH1207	7	52	25	200
3/8"	KADH1208	8	52	25	200
3/8"	KADH1210	10	52	25	200
3/8"	KADH1212	12	52	25	200
1/2"	KADH1604	4	60	25	200
1/2"	KADH1605	5	60	25	200
1/2"	KADH1606	6	60	25	200
1/2"	KADH1607	7	60	25	200
1/2"	KADH1608	8	60	25	200
1/2"	KADH1609	9	60	25	100
1/2"	KADH1610	10	60	25	100
1/2"	KADH1612	12	60	25	100
1/2"	KADH1614	14	60	25	100
1/2"	KADH1617	17	60	25	100
1/2"	KADH1619	19	60	20	80

3/4" DR. Hex Bit Impact Sockets (CR-MO) (DIN 3121)



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	Weight (kg)	Weight (lb)
3/4"	KADH2414	14	105	5	40
3/4"	KADH2417	17	105	5	40
3/4"	KADH2419	19	105	5	40
3/4"	KADH2422	22	105	5	40
3/4"	KADH2424	24	105	5	40
3/4"	KADH2427	27	105	5	40

7PCS 3/8" DR. Hex Bit Impact Socket Rail Set



ITEM NO.	CONTENTS	Weight (kg)	Weight (lb)
GDAG0702	7 KADH1204-1212 4, 5, 6, 7, 8, 10, 12 mm	15 (SET)	

Impact Extension Bar

CR-MO DIN 3121



DRIVE	ITEM NO.	L (inch)	W (mm)	W (inch)
3/8" (10mm)	KACE1203	3	25	200
	KACE1206	6	10	120
	KACE1603	3	10	80
1/2" (12.5mm)	KACE1605	5	10	80
	KACE1610	10	5	40
	KACE2404	4	2	32
3/4" (20mm)	KACE2407	7	2	20
	KACE2410	10	2	16
	KACE2413	13	2	16
1" (25mm)	KACE3207	7	2	16
	KACE3210	10	2	12
	KACE3213	13	2	12

1/2" DR. 6PT Flank Thin Wall Deep Impact Sockets

CR-MO DIN 3121 ISO 1174 ASME B107.110

- Made from premium impact grade Chrome Molybdenum Steel
- Precision machined and heat treated for optimum strength and durability
- Deep thin wall allows easy access to recessed wheel nuts and other hard-to-reach areas
- Feature 6 point flank drive for a snug hold without damaging fastener corners
- Black phosphate finish for added corrosion resistance
- Ideal for wheel lugs



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	ØD (mm)	W (mm)
1/2" (12.5mm sq.)	KABX1617	17	78	24	10
	KABX1619	19	78	26	10
	KABX1621	21	78	28	10

Impact Extension Bar with Quick Release

CR-MO DIN 3121



DRIVE	ITEM NO.	L (inch)	W (mm)	W (inch)
1/2" (12.5mm)	KACB1603	3	15	120
	KACB1605	5	10	80
	KACB1610	10	5	40
3/4" (20mm)	KACB2407	7	2	24
	KACB2413	13	2	12
1" (25mm)	KACB3207	7	2	8
	KACB3213	13	2	8

6PT Flank Thin Wall Impact Sockets

CR-MO DIN 3121



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	ØD (mm)	W (mm)
1" (25mm sq.)	KABU3224	24	75	38	4
	KABU3227	27	75	43	4
	KABU3230	30	80	45	3
	KABU3232	32	80	48	3
	KABU3233	33	80	49	3
	KABU3235	35	80	52	3
	KABU3236	36	80	53	3
	KABU3238	38	80	54	3
	KABU3241	41	80	59	3
	KABU3244	44	80	64	3

3PCS 1/2" DR. 6PT Flank Thin Wall Deep Impact Socket Rail Set


CR-MO



ITEM NO.	CONTENTS
GDAG0301	10 (SET)
KABX1617~1621	1/2" DR. 6PT Flank Thin Wall Deep Impact Sockets 17, 19, 21 mm

O-Ring

DIN 3129

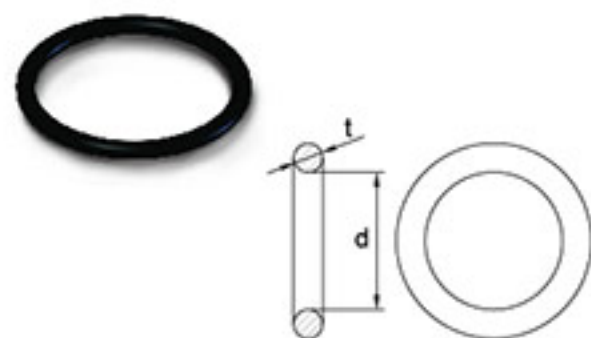

DRIVE	ITEM NO.	SIZE (mm)	d (mm)	t (mm)	W (mm)
3/8" (10mm)	KALO1212	8-12	13	3.5	50
	KALO1222	13-22	16	3.5	50
	KALO1614	8-14	19	4	50
1/2" (12.5mm)	KALO1632	15-32	24	4	50
	KALO2446	17-46	36	5	50
	KALO3270	19-80	45	7	50
1" (25mm)	KALO4895	85-95	76	10	20
	KALO4895	36-90	76	10	20
	KALO4895	36-90	76	10	20

Pin

DIN 3129



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	D (mm)	W (mm)
3/8" (10mm)	KALP1212	8-12	14	2.5	50
	KALP1222	13-22	16	2.5	50
	KALP1614	8-14	20	3	50
1/2" (12.5mm)	KALP1632	15-32	25	3	50
	KALP2446	17-46	35	4	50
	KALP3270	19-80	45	5	50
1" (25mm)	KALP4895	85-95	75	6	20
	KALP4895	36-90	75	6	20
	KALP4895	36-90	75	6	20

1/2" DR. Torque Extension Bar

CR-MO DIN 3121



ITEM NO.	CAPACITY	COLOR	W (mm)	W (inch)
KACT1612	120 ft-lb / 160 Nm	Gray	10	80
KACT1614	140 ft-lb / 190 Nm	White	10	60
KACT1615	150 ft-lb / 200 Nm	Aqua	10	60



Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves

CR-MO DIN 3121 ISO 1174 ASME B107.110

- Made of Chrome Molybdenum Steel
- Deep thin wall allows easy access to recessed wheel nuts
- A protective metal ring design to ensure long-term use; Lifespan up to three times longer than standard impact sockets
- Color coding protection sleeves for easy size identification and protect the rims and aluminum alloy from scratches
- Resin cap insert protects lug nuts & bolts against impact damage
- Torque tested up to 500 Nm



• Metal ring design improves torque bearing capacity



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	COLOR	W (mm)
1/2" (12.5mm sq.)	KABP1615	15	86	Purple	20
	KABP1617	17	86	Blue	20
	KABP1619	19	86	Yellow	20
	KABP1621	21	86	Red	20
	KABP1622	22	86	Green	20

3PCS 1/2" DR. 6PT Flank Pro-Series Thin Wall Deep Impact Socket Set

CR-MO

1/2" DR. 6PT Flank Pro-Series Thin Wall Deep Impact Socket Set



ITEM NO.	CONTENTS
GDAG0301	10 (SET)
KABP1617~1621	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm

1/2" DR. 6PT Flank Extra Long Thin Wall Deep Impact Sockets with Plastic Sleeves

CR-MO DIN 3121



DRIVE	ITEM NO.	SIZE (mm)	L (mm)	COLOR	W (mm)
1/2" (12.5mm sq.)	KABL1617	17	150	Blue	5
	KABL1619	19	150	Green	5
	KABL1621	21	150	Red	5

3PCS 1/2" DR. 6PT Flank Extra Long Thin Wall Deep Impact Socket Set

CR-MO



ITEM NO.	CONTENTS
GDAG0304	10 (SET)
KABL1617~1621	1/2" Dr. 6PT Flank Extra Long Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm

5PCS 1/2" DR. 6PT Flank Pro-Series Thin Wall Deep Impact Socket Set

CR-MO



ITEM NO.	CONTENTS
GDAG0503	10 (SET)
KABP1615~1622	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 15, 17, 19, 21, 22 mm



TOPTUL
IMPACT SOCKET SET

27PCS
1/2" DR. Flank Impact Socket Set (CR-MO)
1/2"



ITEM NO. **GCAI2701**
CONTENTS 4 (SET)
17 KABA1610-1632
1/2" Dr. 6PT Flank Impact Sockets
10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32 mm
1 KACE1605
1/2" Dr. Impact Extension Bar - 5" (L)
1 KACN160B
1/2" Dr. Impact Universal Joint
2 KALP1614
Pin - Size (8-14 mm)
2 KALP1632
Pin - Size (15-32 mm)
2 KALO1614
O-Ring - Size (8-14 mm)
2 KALO1632
O-Ring - Size (15-32 mm)
BLOW CASE: W392 x D210 x H88 (mm)

7PCS
3/8" DR. Hex Bit Impact Socket Set (SNM+V)
3/8"



ITEM NO. **GDAI0704**
CONTENTS 12 (SET)
7 KADH1204-1212
3/8" Dr. Hex Bit Impact Sockets
4, 5, 6, 7, 8, 10, 12 mm
BLOW CASE: W200 x D105 x H35 (mm)

7PCS
1/2" DR. Hex Bit Impact Socket Set (SNM+V)
1/2"



ITEM NO. **GDAI0702**
CONTENTS 18 (SET)
7 KADH1604-1614
1/2" Dr. Hex Bit Impact Sockets
4, 5, 6, 8, 10, 12, 14 mm
BLOW CASE: W250 x D120 x H40 (mm)

8PCS
3/4" DR. 6PT Flank Impact Socket Set (CR-MO)
3/4"



ITEM NO. **GDAI0802**
CONTENTS 3 (SET)
8 KABA2422-2438
3/4" Dr. 6PT Flank Impact Sockets
22, 24, 27, 30, 32, 33, 36, 38 mm
BLOW CASE: W452 x D119 x H64 (mm)

7PCS
3/8" DR. Star Bit Impact Socket Set (SNM+V)
3/8"



ITEM NO. **GDAI0703**
CONTENTS 12 (SET)
7 KADA1220-1250
3/8" Dr. Star Bit Impact Sockets
T20, T25, T27, T30, T40, T45, T50
BLOW CASE: W200 x D105 x H35 (mm)

7PCS
1/2" DR. Star Bit Impact Socket Set (SNM+V)
1/2"



ITEM NO. **GDAI0701**
CONTENTS 18 (SET)
7 KADA1630-1670
1/2" Dr. Star Bit Impact Sockets
T30, T40, T45, T50, T55, T60, T70
BLOW CASE: W250 x D120 x H40 (mm)

8PCS
3/4" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
3/4"



ITEM NO. **GDAI0804**
CONTENTS 3 (SET)
8 KABA2422-2438
3/4" Dr. 6PT Flank Deep Impact Sockets
22, 24, 27, 30, 32, 33, 36, 38 mm
BLOW CASE: W452 x D119 x H64 (mm)

8PCS
3/8" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
3/8"



ITEM NO. **GDAD0808**
CONTENTS 10 (SET)
8 KABA1208-1219
3/8" Dr. 6PT Flank Deep Impact Sockets
8, 10, 11, 12, 13, 14, 17, 19 mm
METAL CASE: W197 x D103 x H33 (mm)

12PCS
3/8" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
3/8"



ITEM NO. **GDAD1201**
CONTENTS 8 (SET)
12 KABA1208-1219
3/8" Dr. 6PT Flank Deep Impact Sockets
8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19 mm
METAL CASE: W313 x D111 x H38 (mm)



10PCS
1/2" DR. 6PT Flank Impact Socket Set (METRIC) (CR-MO)
1/2"



ITEM NO. **GDAD1001**
CONTENTS 16 (SET)
10 KABA1610-1624
1/2" Dr. 6PT Flank Impact Sockets
10, 11, 12, 13, 14, 17, 19, 21, 22, 24 mm
METAL CASE: W303 x D45 x H47 (mm)

10PCS
1/2" DR. 6PT Flank Deep Impact Socket Set (METRIC) (CR-MO)
1/2"



ITEM NO. **GDAD1002**
CONTENTS 8 (SET)
10 KABA1610-1624
1/2" Dr. 6PT Flank Deep Impact Sockets
10, 11, 12, 13, 14, 17, 19, 21, 22, 24 mm
METAL CASE: W313 x D111 x H38 (mm)

18PCS
1/2" DR. 6PT Flank Impact Socket Set (CR-MO)
1/2"



ITEM NO. **GCAD1807**
CONTENTS 6 (SET)
17 KABA1610-1632
1/2" Dr. 6PT Flank Impact Sockets
10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 23, 24, 27, 30, 32 mm
1 KACE1605
1/2" Dr. Impact Extension Bar - 5" (L)
METAL CASE: W370 x D154 x H50 (mm)

10PCS
1/2" DR. 6PT Flank Impact Socket Set (SAE) (CR-MO)
1/2"



ITEM NO. **GEAD1001**
CONTENTS 16 (SET)
10 KABA1614-1632
1/2" Dr. 6PT Flank Impact Sockets
7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1"
METAL CASE: W303 x D45 x H47 (mm)

10PCS
1/2" DR. 6PT Flank Deep Impact Socket Set (SAE) (CR-MO)
1/2"



ITEM NO. **GEAD1002**
CONTENTS 8 (SET)
10 KABA1614-1632
1/2" Dr. 6PT Flank Deep Impact Sockets
7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1"
METAL CASE: W313 x D111 x H38 (mm)

32PCS
1/2" DR. Flank Impact Socket Set (CR-MO)
1/2"



ITEM NO. **GDAD3201**
CONTENTS 3 (SET)
18 KABA1608-1632
1/2" Dr. 6PT Flank Impact Sockets
8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32 mm
12 KABA1612-1632
1/2" Dr. 6PT Flank Deep Impact Sockets
12, 13, 14, 16, 17, 19, 21, 22, 24, 27, 30, 32 mm
1 KACE1605
1/2" Dr. Impact Extension Bar - 5" (L)
1 KACN160B
1/2" Dr. Impact Universal Joint
METAL CASE: W445 x D188 x H50 (mm)

15PCS

 1/2" DR. 6PT Flank Impact Socket Set (CR-MO)
 1/2"


Black Phosphate Finished
 ITEM NO. **GDAD1501**
 CONTENTS 6 (SET)
 15 KABA1610-1624
 1/2" Dr. 6PT Flank Impact Sockets
 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22,
 23, 24 mm
 METAL CASE: W240 x D110 x H50 (mm)

8PCS

 3/4" DR. 6PT Flank Impact Socket Set (CR-MO)
 3/4"


Black Phosphate Finished
 ITEM NO. **GDAD0805**
 CONTENTS 4 (SET)
 8 KABA2419-2436
 3/4" Dr. 6PT Flank Impact Sockets
 19, 22, 24, 27, 30, 32, 34, 36 mm
 METAL CASE: W410 x D64 x H60 (mm)

8PCS

 3/4" DR. 6PT Flank Impact Socket Set (CR-MO)
 3/4"


Black Phosphate Finished
 ITEM NO. **GDAD0801**
 CONTENTS 4 (SET)
 8 KABA2426-2438
 3/4" Dr. 6PT Flank Impact Sockets
 26, 27, 29, 30, 32, 35, 36, 38 mm
 METAL CASE: W410 x D64 x H60 (mm)

8PCS

 3/4" DR. 6PT Flank Impact Socket Set (CR-MO)
 3/4"


Black Phosphate Finished
 ITEM NO. **GDAD0806**
 CONTENTS 4 (SET)
 8 KABA2422-2441
 3/4" Dr. 6PT Flank Impact Sockets
 22, 24, 27, 30, 32, 36, 38, 41 mm
 METAL CASE: W410 x D64 x H60 (mm)

8PCS

 1" DR. 6PT Flank Impact Socket Set (CR-MO)
 1"


Black Phosphate Finished
 ITEM NO. **GDAD0803**
 CONTENTS 3 (SET)
 8 KABA3224-3241
 1" Dr. 6PT Flank Impact Sockets
 24, 27, 30, 32, 33, 36, 38, 41 mm
 METAL CASE: W278 x D128 x H75 (mm)

9PCS

 1" DR. Flank Impact Socket Set (CR-MO)
 1"


Black Phosphate Finished
 ITEM NO. **GDAD0901**
 CONTENTS 3 (SET)
 9 KABA3224-3241
 1" Dr. 6PT Flank Impact Sockets
 24, 27, 32, 36, 38, 41 mm
 9 KABM3217-3221
 1" Dr. Square Budd Wheel Impact Sockets (4PT)
 17, 19, 21 mm
 METAL CASE: W278 x D128 x H75 (mm)

8PCS

 1" DR. 6PT Flank Thin Wall Impact Socket Set (CR-MO)
 1"


Black Phosphate Finished
 ITEM NO. **GDAD0809**
 CONTENTS 2 (SET)
 8 KABU3227-3241
 1" Dr. 6PT Flank Thin Wall Impact Sockets
 27, 30, 32, 33, 35, 36, 38, 41 mm
 METAL CASE: W430 x D103 x H70 (mm)

8PCS

 3/4" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
 3/4"


Black Phosphate Finished
 ITEM NO. **GDAD0807**
 CONTENTS 2 (SET)
 8 KABE2422-2438
 3/4" Dr. 6PT Flank Deep Impact Sockets
 22, 24, 27, 30, 32, 34, 36, 38 mm
 METAL CASE: W430 x D103 x H70 (mm)

8PCS

 3/4" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
 3/4"


Black Phosphate Finished
 ITEM NO. **GDAD0802**
 CONTENTS 2 (SET)
 8 KABE2426-2438
 3/4" Dr. 6PT Flank Deep Impact Sockets
 26, 27, 29, 30, 32, 35, 36, 38 mm
 METAL CASE: W430 x D103 x H70 (mm)

8PCS

 1" DR. 6PT Flank Deep Impact Socket Set (CR-MO)
 1"


Black Phosphate Finished
 ITEM NO. **GDAD0804**
 CONTENTS 2 (SET)
 8 KABE3224-3241
 1" Dr. 6PT Flank Deep Impact Sockets
 24, 27, 30, 32, 33, 36, 38, 41 mm
 METAL CASE: W460 x D128 x H80 (mm)

Super Duty Air Ratchet Wrench

1/4" DR.

 Mini Super Duty Air Ratchet Wrench
 • Rear Exhaust with Muffler


ITEM NO. **KAAE0802**
 SPECIFICATIONS 20
 Max. Torque 30 ft-lb / 41 Nm
 Free Speed 350 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 2.24 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 5/16" I.D.
 Overall Length 5-7/64" / 130 mm
 Net Weight 0.99 lbs / 0.45 kgs

3/8" DR.

 Mini Super Duty Air Ratchet Wrench
 • Rear Exhaust with Muffler


ITEM NO. **KAAE1202**
 SPECIFICATIONS 20
 Max. Torque 30 ft-lb / 41 Nm
 Free Speed 350 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 2.24 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 5/16" I.D.
 Overall Length 5-7/64" / 130 mm
 Net Weight 0.99 lbs / 0.45 kgs

3/8" DR.

 Mini Super Duty Air Impact Wrench
 • Handle Exhaust with Muffler


ITEM NO. **KAAG1206**
 SPECIFICATIONS 12
 Max. Torque 60 ft-lb / 81 Nm
 Free Speed 11000 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 1.76 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 3/8" I.D.
 Overall Length 5-29/32" / 150 mm
 Net Weight 1.56 lbs / 0.71 kgs

3/8" DR.

 Mini Super Duty Air Impact Ratchet Wrench
 • Impact Mechanism: Unicorn Hammer
 • Rear Exhaust with Muffler


• Powerful & High R.P.M. - type
 ITEM NO. **KAAP1205**
 SPECIFICATIONS 30
 Max. Torque 50 ft-lb / 68 Nm
 Free Speed 700 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 3.1 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 3/8" I.D.
 Overall Length 6-1/2" / 164 mm
 Net Weight 1.32 lbs / 0.6 kgs

3/8" DR.

 Super Duty Air Ratchet Wrench
 • Rear Exhaust with Muffler


ITEM NO. **KAAF1205**
 SPECIFICATIONS 10
 Max. Torque 75 ft-lb / 102 Nm
 Free Speed 160 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 3.92 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 5/16" I.D.
 Overall Length 10-1/2" / 266 mm
 Net Weight 2.64 lbs / 1.2 kgs

1/2" DR.

 Super Duty Air Ratchet Wrench
 • Rear Exhaust with Muffler


ITEM NO. **KAAF1605**
 SPECIFICATIONS 10
 Max. Torque 75 ft-lb / 102 Nm
 Free Speed 160 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 3.92 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 5/16" I.D.
 Overall Length 10-1/2" / 266 mm
 Net Weight 2.64 lbs / 1.2 kgs

1/4" DR. / 3/8" DR. / 1/4" HEX.

 Mini Multi-Function Air Ratchet Wrench Set
 • Super durable compact ratchet head with 3 pcs
 adapters, 1/4", 3/8" square drive & 1/4" Hex. bit holder
 • Double-sided use, change the position of the adapter
 to switch between forward and reverse
 • Rear Exhaust

Powerful & Lightweight Model

ITEM NO. **GDAG0402**
 SPECIFICATIONS 20 (SET)
 Max. Torque 40 ft-lb / 54 Nm
 Free Speed 400 RPM
 Air Pressure 90 PSI / 6.2 BAR
 Air Consumption 3 CFM
 Air Inlet 1/4" PT
 Min. Air Hose 3/8" I.D.
 Overall Length 6-5/16" / 160 mm
 Net Weight 1.06 lbs / 0.48 kgs

3/8" DR.

Super Duty Air Ratchet Wrench

- Dust-free compact head cap. Seal ratchet head prevents dirt and dust from entering
- Unique dual pawl ratchet design provides stronger torque output and longer tool life
- Real Exhaust with Muffler



ITEM NO.	KAAF1204
SPECIFICATIONS	30
Max. Torque	40 ft-lb / 54 Nm
Free Speed	270 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	2.8 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-1/16" / 205 mm
Net Weight	1.45 lbs / 0.66 kgs

1/2" DR.

Super Duty Air Ratchet Wrench

- Dust-free compact head cap. Seal ratchet head prevents dirt and dust from entering
- Unique dual pawl ratchet design provides stronger torque output and longer tool life
- Rotary Exhaust with Muffler



ITEM NO.	KAAF1608
SPECIFICATIONS	12
Max. Torque	80 ft-lb / 108 Nm
Free Speed	280 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	10-29/32" / 277 mm
Net Weight	2.7 lbs / 1.23 kgs

1/2" DR.

Super Duty Air Ratchet Wrench


- Dust-free compact head cap. Seal ratchet head prevents dirt and dust from entering
- Unique dual pawl ratchet design provides stronger torque output and longer tool life
- Rotary Exhaust with Muffler



ITEM NO.	KAAF1610
SPECIFICATIONS	12
Max. Torque	100 ft-lb / 136 Nm
Free Speed	225 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	12-13/32" / 315 mm
Net Weight	3.39 lbs / 1.54 kgs

Super Duty Air Impact Ratchet Wrench

- Impact Mechanism : Unicorn Hammer
- Front Exhaust with Muffler

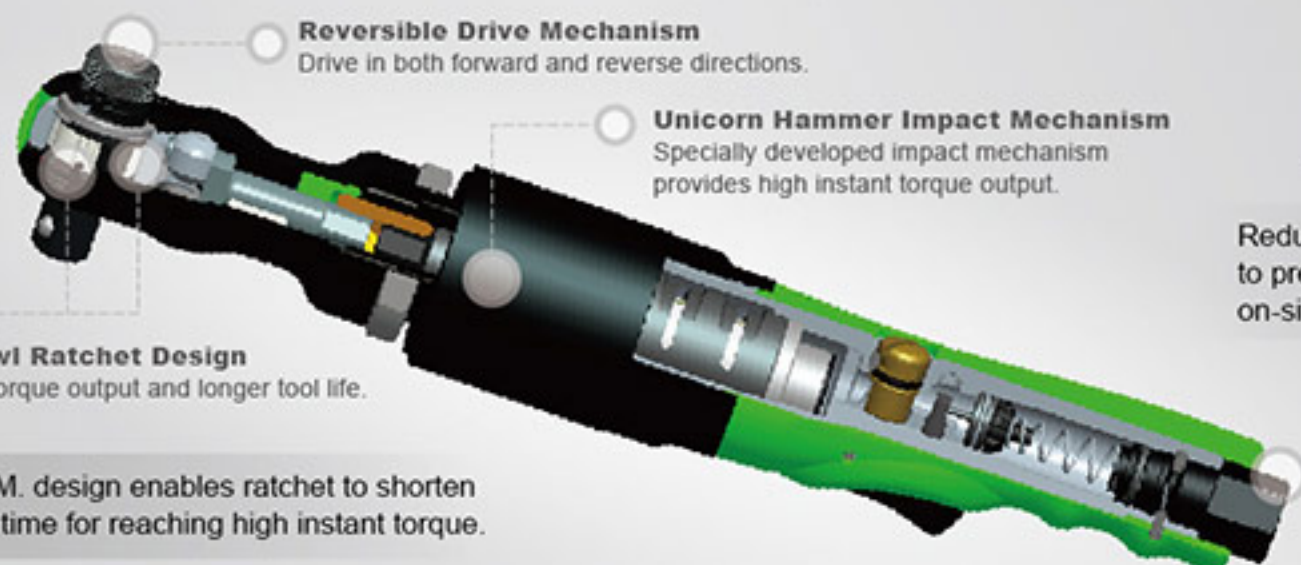

High R.P.M. design enables ratchet to shorten operating time for reaching high instant torque.

1/2" DR.

Super Duty Air Impact Ratchet Wrench



ITEM NO.	KAAL1610
SPECIFICATIONS	12
Max. Torque	100 ft-lb / 136 Nm
Free Speed	600 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	11-7/8" / 301 mm
Net Weight	3.97 lbs / 1.8 kgs

1/2" DR.

Super Duty Air Impact Ratchet Wrench



ITEM NO.	KAAL1612
SPECIFICATIONS	10
Max. Torque	120 ft-lb / 163 Nm
Free Speed	600 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.2 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	13-3/4" / 350 mm
Net Weight	4.14 lbs / 1.88 kgs



Pressure High Torque High Speed




Dust-Free Compact Head Cap
Sealed ratchet head prevents dirt and dust from entering.



Composite Grip Handle
Lightweight and ergonomic design for positive grip.

Super Duty Air Impact Wrench

- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler

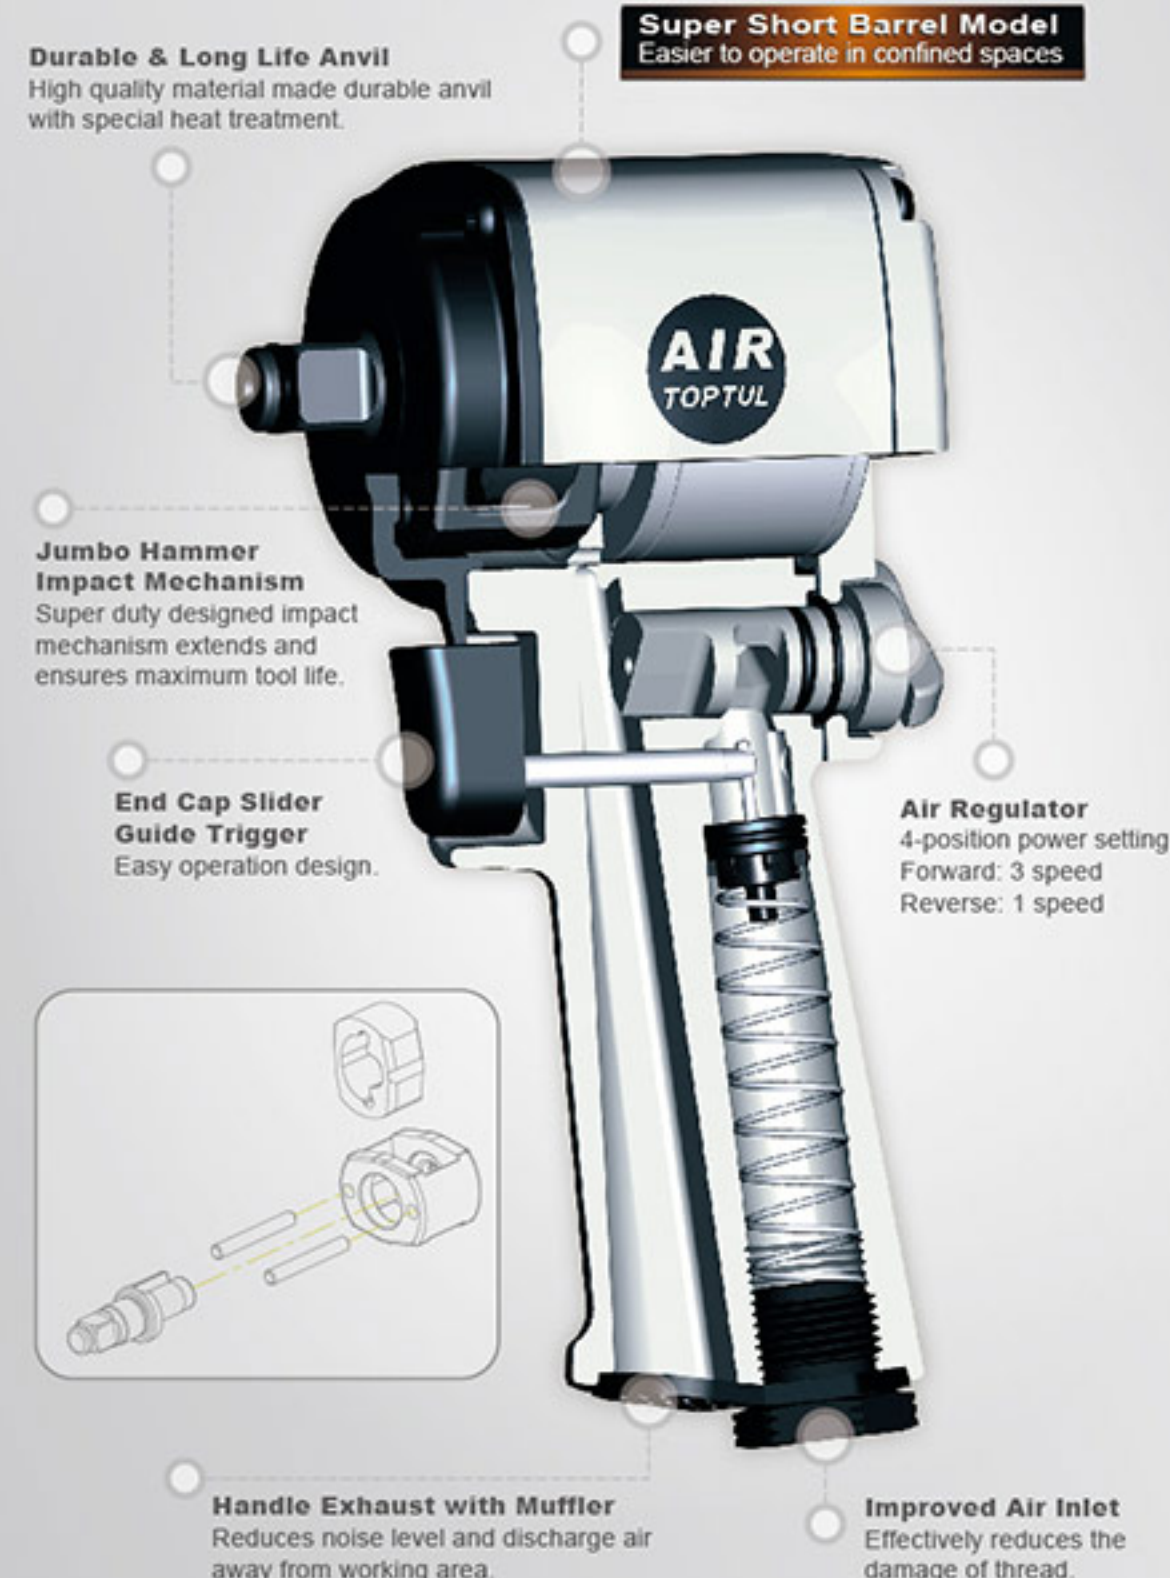

Durable & Long Life Anvil
High quality material made durable anvil with special heat treatment.

Super Short Barrel Model
Easier to operate in confined spaces

Jumbo Hammer Impact Mechanism
Super duty designed impact mechanism extends and ensures maximum tool life.

End Cap Slider Guide Trigger
Easy operation design.

Air Regulator
4-position power setting.
Forward: 3 speed
Reverse: 1 speed

Handle Exhaust with Muffler
Reduces noise level and discharge air away from working area.

Improved Air Inlet
Effectively reduces the damage of thread.

1/2" DR.

Super Duty Air Impact Wrench

- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler



Short Barrel Model
Easier to operate in confined spaces



Powerful, Lightweight & Short Barrel Model

ITEM NO.	KAAQ1650
SPECIFICATIONS	10
Max. Torque	500 ft-lb / 678 Nm
Free Speed	9500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	4-5/16" / 109 mm
Net Weight	2.92 lbs / 1.32 kgs



One-Hand Switch Knob
F/R operation design with changeable knob and suitable for both left and right handed users.



Air Regulator
3-position power setting for both forward and reverse directions.

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Impact Wrench

- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler

High-performance


KAAA1640
1/2" DR.
600 FT-LBS


ITEM NO.	KAAA1640	8
SPECIFICATIONS		
Max. Torque	600 ft-lb / 813 Nm	
Free Speed	8000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	4 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	7-1/2" / 191 mm	
Net Weight	5.78 lbs / 2.62 kgs	

3/8" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler



ITEM NO.	KAAA1220	10
SPECIFICATIONS		
Max. Torque	200 ft-lb / 271 Nm	
Free Speed	10000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	2.5 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	5-1/2" / 139 mm	
Net Weight	3.00 lbs / 1.36 kgs	

1/2" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : New Twin Hammer
- Handle Exhaust with Muffler


700 FT-LBS

ITEM NO.	KAAA1660	8
SPECIFICATIONS		
Max. Torque	700 ft-lb / 949 Nm	
Free Speed	6500 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	4.4 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	7-1/2" / 191 mm	
Net Weight	6.24 lbs / 2.83 kgs	

1/2" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler



ITEM NO.	KAAA1620	10
SPECIFICATIONS		
Max. Torque	200 ft-lb / 271 Nm	
Free Speed	10000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	2.5 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	5-1/2" / 139 mm	
Net Weight	3.00 lbs / 1.36 kgs	

1/2" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Twin Hammer
- Front Exhaust


600 FT-LBS
5-Position Forward & Reverse Power Setting

ITEM NO.	KAAA1660B	8
SPECIFICATIONS		
Max. Torque	600 ft-lb / 813 Nm	
Free Speed	8000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	4 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	7-13/32" / 188 mm	
Net Weight	5.73 lbs / 2.60 kgs	

3/8" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler



ITEM NO.	KAAX1235	10
SPECIFICATIONS		
Max. Torque	350 ft-lb / 475 Nm	
Free Speed	8000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	4.5 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	5-5/16" / 135 mm	
Net Weight	3.96 lbs / 1.8 kgs	

1/2" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler



ITEM NO.	KAAX1650	10
SPECIFICATIONS		
Max. Torque	500 ft-lb / 678 Nm	
Free Speed	10000 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	5.6 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	5-45/64" / 145 mm	
Net Weight	4.18 lbs / 1.9 kgs	

Twin Hammer Mechanism & Patent Grease Injection Hole

3/4" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Twin Hammer
- Patent grease injection hole design for easy to lubricate the impact mechanism
- Includes a grease tube (ITEM NO.: KALJ0201) that can be used four times
- Handle Exhaust


1200 FT-LBS
Powerful & Lightweight Model

ITEM NO.	KAAA2412	6
SPECIFICATIONS		
Max. Torque	1200 ft-lb / 1627 Nm	
Free Speed	7200 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	8.13 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	6-31/32" / 177 mm	
Net Weight	5.82 lbs / 2.64 kgs	

AIR TOPTUL Impact Wrench

For Automotive Repairs & Maintenance

Manufacturer's Limited Warranty

All AIR TOPTUL Serial pneumatic tools are provided with complete service and product warranty to the product that manufactured by TOPTUL and sold by it's worldwide authorized dealers.

TOPTUL professional air tools, unless otherwise specified, are unconditionally guaranteed against defects in materials and workmanship for the life of the tool, excluding any other inappropriate operation, modification or repair.



1/2" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAB1640
SPECIFICATIONS	8
Max. Torque	400 ft-lb / 542 Nm
Free Speed	8000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	9-17/32" / 242 mm
Net Weight	6.02 lbs / 2.73 kgs

1/2" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAB1660
SPECIFICATIONS	8
Max. Torque	600 ft-lb / 813 Nm
Free Speed	6500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	9-11/16" / 246 mm
Net Weight	6.50 lbs / 2.95 kgs

3/4" DR.

Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAA2460
SPECIFICATIONS	8
Max. Torque	600 ft-lb / 813 Nm
Free Speed	6300 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-5/32" / 207 mm
Net Weight	6.39 lbs / 2.90 kgs

3/4" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAB2460
SPECIFICATIONS	8
Max. Torque	600 ft-lb / 813 Nm
Free Speed	6300 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	10-1/2" / 260 mm
Net Weight	6.81 lbs / 3.09 kgs

3/4" DR.

Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAA2475
SPECIFICATIONS	4
Max. Torque	750 ft-lb / 1016 Nm
Free Speed	6500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	9-7/32" / 234 mm
Net Weight	9.83 lbs / 4.46 kgs

1" DR.

Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Side Exhaust with Muffler
• Inside Trigger



ITEM NO.	KAAA321808
SPECIFICATIONS	1
Max. Torque	1800 ft-lb / 2440 Nm
Free Speed	4000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	14-15/16" / 380 mm
Net Weight	24.71 lbs / 11.21 kgs

1" DR.

Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Side Exhaust with Muffler
• Outside Trigger



ITEM NO.	KAAA321809
SPECIFICATIONS	1
Max. Torque	1800 ft-lb / 2440 Nm
Free Speed	4000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	15-11/32" / 390 mm
Net Weight	24.89 lbs / 11.29 kgs

3/4" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Handle Exhaust with Muffler



ITEM NO.	KAAB2475
SPECIFICATIONS	4
Max. Torque	750 ft-lb / 1016 Nm
Free Speed	6500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	13-1/2" / 343 mm
Net Weight	10.81 lbs / 4.90 kgs

1" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Side Exhaust with Muffler
• Inside Trigger



ITEM NO.	KAAB321808
SPECIFICATIONS	1
Max. Torque	1800 ft-lb / 2440 Nm
Free Speed	4000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	20-1/16" / 510 mm
Net Weight	27.18 lbs / 12.33 kgs

1" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism : New Twin Hammer
• Side Exhaust with Muffler
• Outside Trigger



ITEM NO.	KAAB321809
SPECIFICATIONS	1
Max. Torque	1800 ft-lb / 2440 Nm
Free Speed	4000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	20-1/4" / 515 mm
Net Weight	27.27 lbs / 12.37 kgs

TOPTUL AIR IMPACT WRENCH SERIES





TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Long Anvil Super Duty Air Impact Wrench

- Impact Mechanism : New Twin Hammer
- Side Exhaust with Muffler
- Inside Trigger

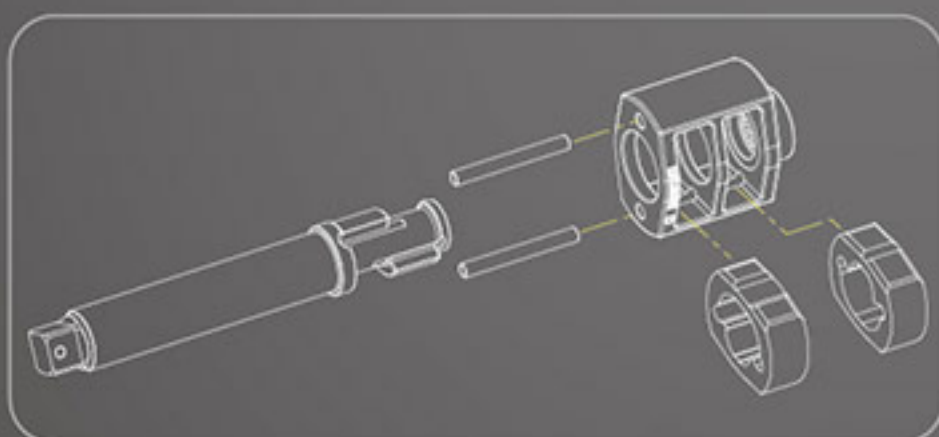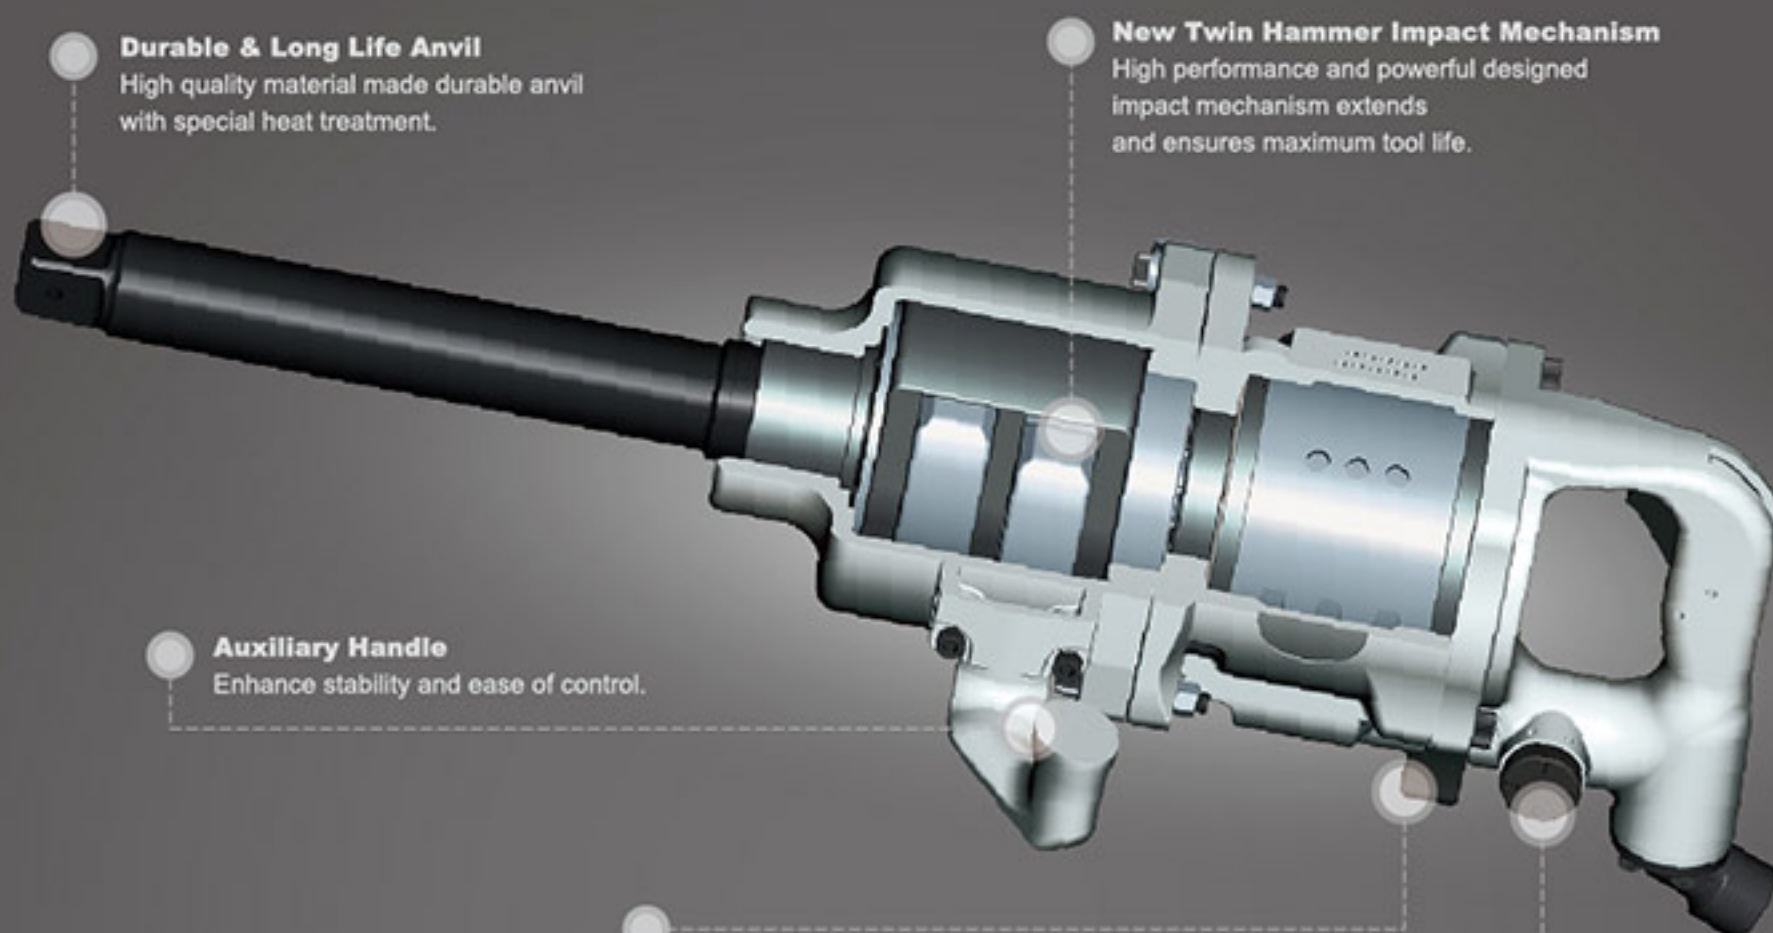

High-performance

KAAB3225



1" DR.



ITEM NO.	KAAB3225
SPECIFICATIONS	
Max. Torque	2500 ft-lb / 3390 Nm
Free Speed	3000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	14.5 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	25" / 634 mm
Net Weight	37.04 lbs / 16.8 kgs

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Long Anvil Super Duty Air Impact Wrench

- Impact Mechanism : Twin Hammer
- Side Exhaust
- Inside Trigger

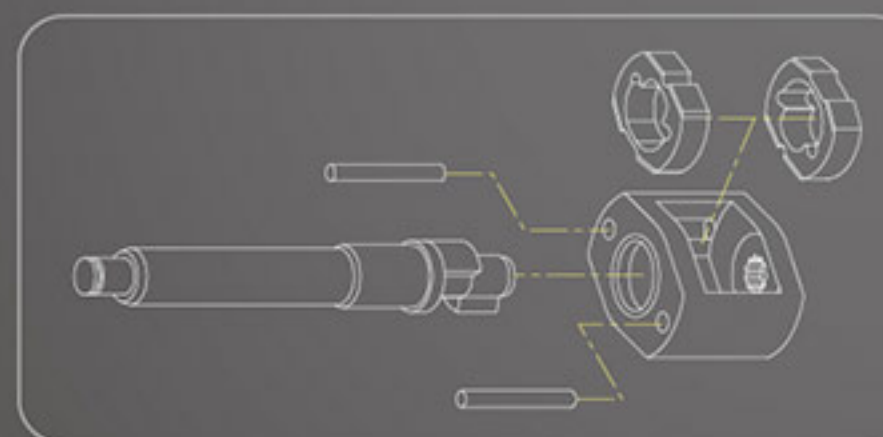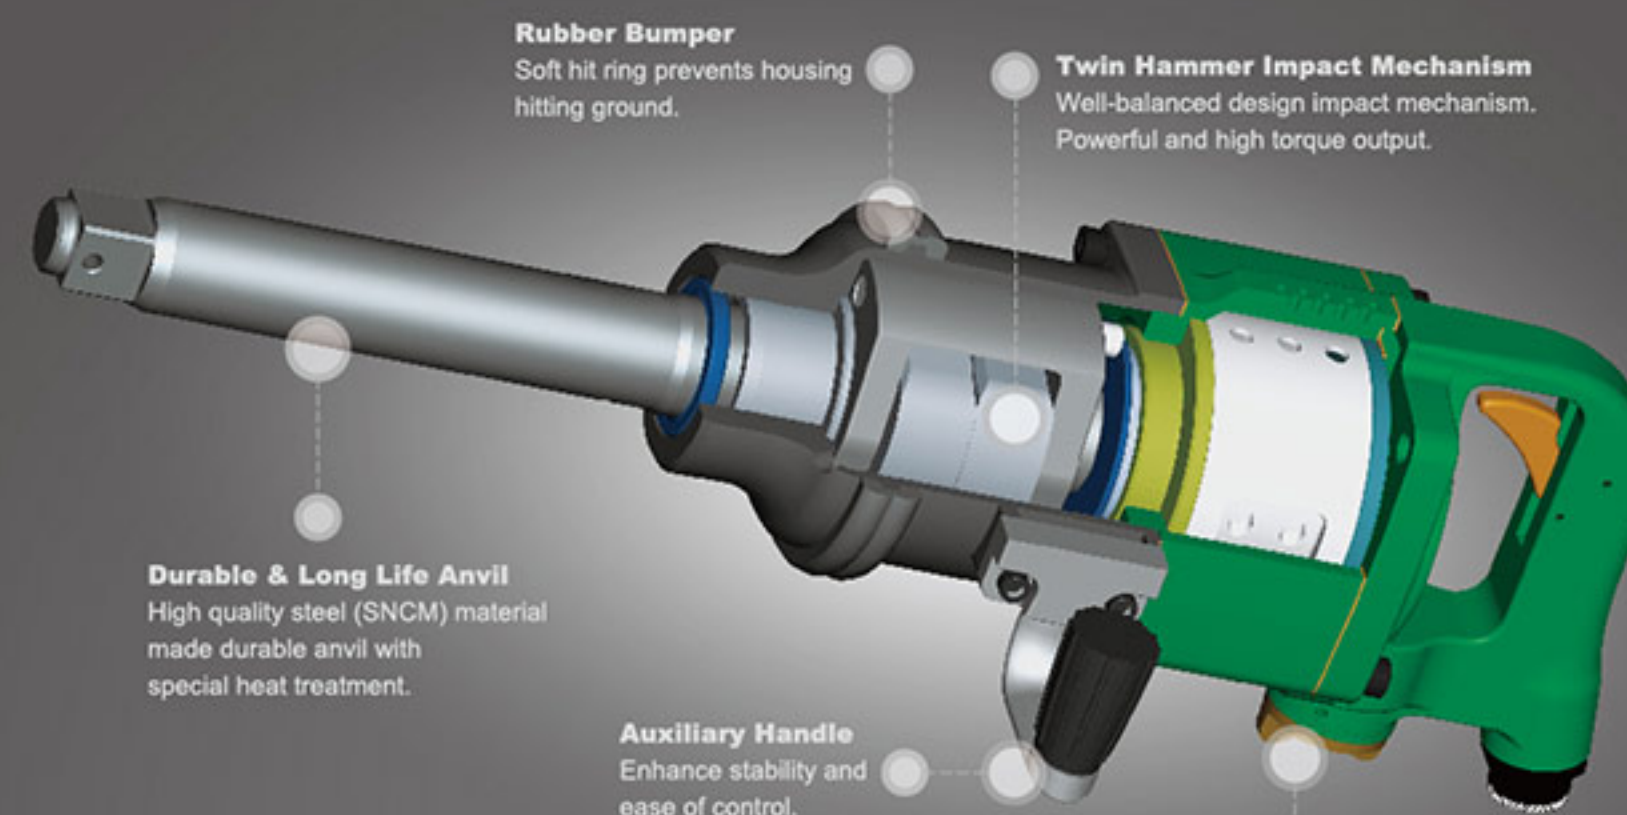

High-performance

KAAB3226



1" DR.

ITEM NO.	KAAB3226
SPECIFICATIONS	
Max. Torque	2600 ft-lb / 3520 Nm
Free Speed	3000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	14 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	22-5/8" / 575 mm
Net Weight	28.31 lbs / 12.84 kgs

10PCS

1/2" DR. Super Duty Air Impact Wrench Set
1/2"



ITEM NO.	GDAI001E
CONTENTS	4 (SET)
1 KAAQ1650	1/2" Dr. Super Duty Air Impact Wrench (500 ft-lb / 678 Nm)
2 KABA1613-1624	1/2" Dr. 6PT Flank Impact Sockets 13, 17, 19, 21, 22, 24 mm
3 KALB1501	Oil Pot - 15 c.c
4 KALA0815	1/4" Mini Oiler
5 KALC081E (Item No. GDAI001E)	1/4" Air Nipple (European Type)
6 KALC082J (Item No. GDAI001J)	1/4" Air Nipple (Japanese Type)
BLOW CASE: W392 x D210 x H88 (mm)	

20PCS

1/2" DR. Air Impact Wrench Set
• Heavy duty 1/2 SQ. twin hammer mechanism air impact wrench, front exhaust (Adjustable power regulator, 5-position forward and reverse power setting)
• Include one mini oiler to keep impact wrench lubricated



ITEM NO.	GDAI2002E
CONTENTS	3 (SET)
1 KAAA1660B	1/2" Dr. Standard Anvil Super Duty Air Impact Wrench (600 ft-lb / 813 Nm)
2 KABA1610-1627	1/2" Dr. 6PT Flank Impact Sockets 10, 11, 12, 13, 14, 16, 17, 19, 21, 22, 24, 27 mm
3 KABP1617-1621	1/2" Dr. 6PT Flank Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm
4 KACE1605	1/2" Dr. Impact Extension Bar - 5" (L)
5 KALB1501	Oil Pot - 15 c.c
6 KALA0815	1/4" Mini Oiler
7 KALC081E (Item No. GDAI2002E)	1/4" Air Inlet Nipple (European Type)
8 KALC082J (Item No. GDAI2002J)	1/4" Air Inlet Nipple (Japanese Type)
BLOW CASE: W478 x D234 x H100 (mm)	

27PCS

1/2" DR. Air Impact Wrench Set
- Standard Anvil
1/2"



ITEM NO.	GDAI2701
CONTENTS	3 (SET)
1 KAAA1640	1/2" Dr. Standard Anvil Super Duty Impact Wrench (600 ft-lb / 813 Nm)
2 KABA1610-1624	1/2" Dr. 6PT Flank Impact Sockets 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 24 mm
3 KABP1617-1621	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm
4 KACE1605	1/2" Dr. Impact Extension Bar - 5" (L)
5 KACN160B	1/2" Dr. Impact Universal Joint
6 KALO1614 & 1632	O-Ring 8-14 mm x 2pcs & 15-32 mm x 2pcs
7 KALP1614 & 1632	Pin 8-14 mm x 2pcs & 15-32 mm x 2pcs
8 KALB1501	Oil Pot 15 c.c
BLOW CASE: W478 x D234 x H100 (mm)	

27PCS

1/2" DR. Air Impact Wrench Set
- Long Anvil
1/2"



ITEM NO.	GDAI2702
CONTENTS	3 (SET)
1 KAAB1640	1/2" Dr. Long Anvil Super Duty Impact Wrench (400 ft-lb / 542 Nm)
2 KABA1610-1624	1/2" Dr. 6PT Flank Impact Sockets 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 24 mm
3 KABP1617-1621	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm
4 KACE1605	1/2" Dr. Impact Extension Bar - 5" (L)
5 KACN160B	1/2" Dr. Impact Universal Joint
6 KALO1614 & 1632	O-Ring 8-14 mm x 2pcs & 15-32 mm x 2pcs
7 KALP1614 & 1632	Pin 8-14 mm x 2pcs & 15-32 mm x 2pcs
8 KALB1501	Oil Pot 15 c.c
BLOW CASE: W478 x D234 x H100 (mm)	

27PCS

1/2" DR. Air Impact Wrench Set
- Standard Anvil
1/2"



ITEM NO.	GDAI2703
CONTENTS	3 (SET)
1 KAAA1660	1/2" Dr. Standard Anvil Super Duty Impact Wrench (700 ft-lb / 949 Nm)
2 KABA1610-1624	1/2" Dr. 6PT Flank Impact Sockets 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 24 mm
3 KABP1617-1621	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm
4 KACE1605	1/2" Dr. Impact Extension Bar - 5" (L)
5 KACN160B	1/2" Dr. Impact Universal Joint
6 KALO1614 & 1632	O-Ring 8-14 mm x 2pcs & 15-32 mm x 2pcs
7 KALP1614 & 1632	Pin 8-14 mm x 2pcs & 15-32 mm x 2pcs
8 KALB1501	Oil Pot 15 c.c
BLOW CASE: W478 x D234 x H100 (mm)	

27PCS

1/2" DR. Air Impact Wrench Set
- Long Anvil
1/2"



ITEM NO.	GDAI2704
CONTENTS	3 (SET)
1 KAAB1660	1/2" Dr. Long Anvil Super Duty Impact Wrench (600 ft-lb / 813 Nm)
2 KABA1610-1624	1/2" Dr. 6PT Flank Impact Sockets 10, 11, 12, 13, 14, 17, 18, 19, 20, 21, 22, 24 mm
3 KABP1617-1621	1/2" Dr. 6PT Flank Pro-Series Thin Wall Deep Impact Sockets with Plastic Sleeves 17, 19, 21 mm
4 KACE1605	1/2" Dr. Impact Extension Bar - 5" (L)
5 KACN160B	1/2" Dr. Impact Universal Joint
6 KALO1614 & 1632	O-Ring 8-14 mm x 2pcs & 15-32 mm x 2pcs
7 KALP1614 & 1632	Pin 8-14 mm x 2pcs & 15-32 mm x 2pcs
8 KALB1501	Oil Pot 15 c.c
BLOW CASE: W478 x D234 x H100 (mm)	



TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Mini Butterfly Type Air Impact Wrench

- Impact Mechanism : Twin Dog Clutch
- Side Exhaust with Muffler

MINI DESIGN
LIGHT WEIGHT

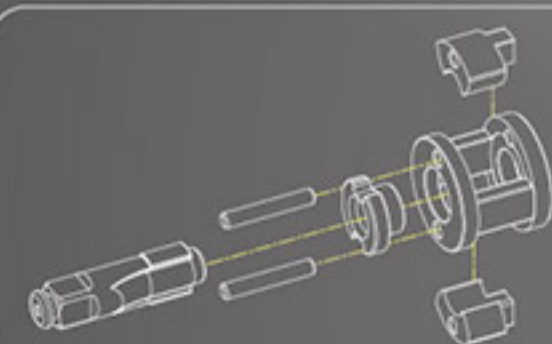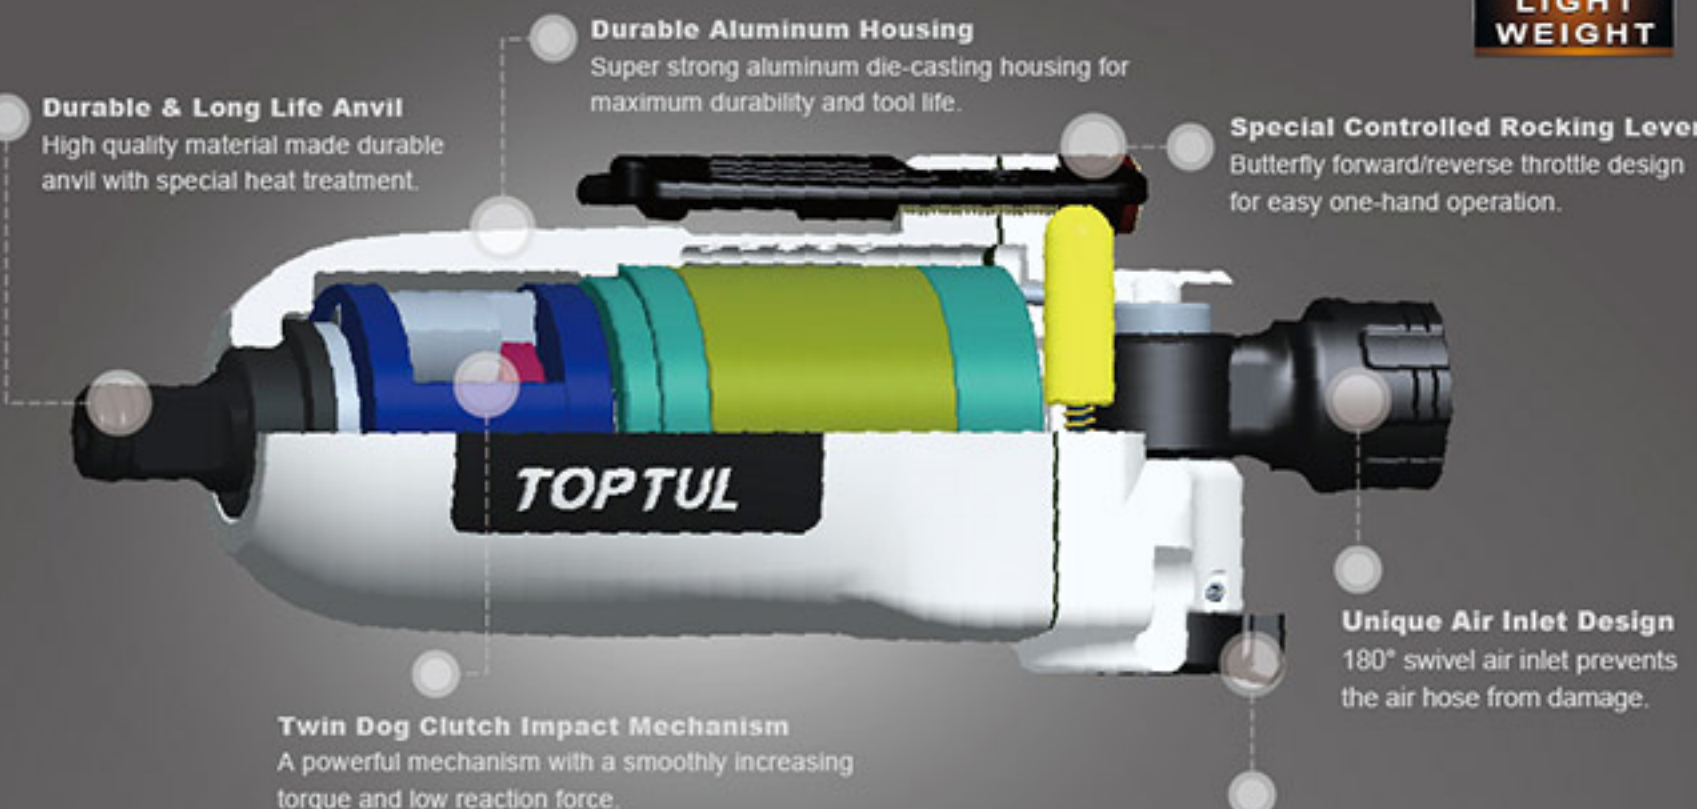

High-performance

KAAU0808

KAAU1208

1/4" DR.

80 FT-LBS

3/8" DR.

80 FT-LBS



• Powerful, Lightweight & Mini Model

ITEM NO.	KAAU0808
SPECIFICATIONS	30
Max. Torque	80 ft-lb / 108 Nm
Free Speed	12000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	2.1 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	5-1/2" / 139 mm
Net Weight	1.17 lbs / 0.53 kgs

• Powerful, Lightweight & Mini Model

ITEM NO.	KAAU1208
SPECIFICATIONS	30
Max. Torque	80 ft-lb / 108 Nm
Free Speed	12000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	2.1 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	5-1/2" / 139 mm
Net Weight	1.17 lbs / 0.53 kgs


TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Angle Impact Wrench

- Impact Mechanism : Jumbo Hammer
- Rear Exhaust with Muffler

High-performance

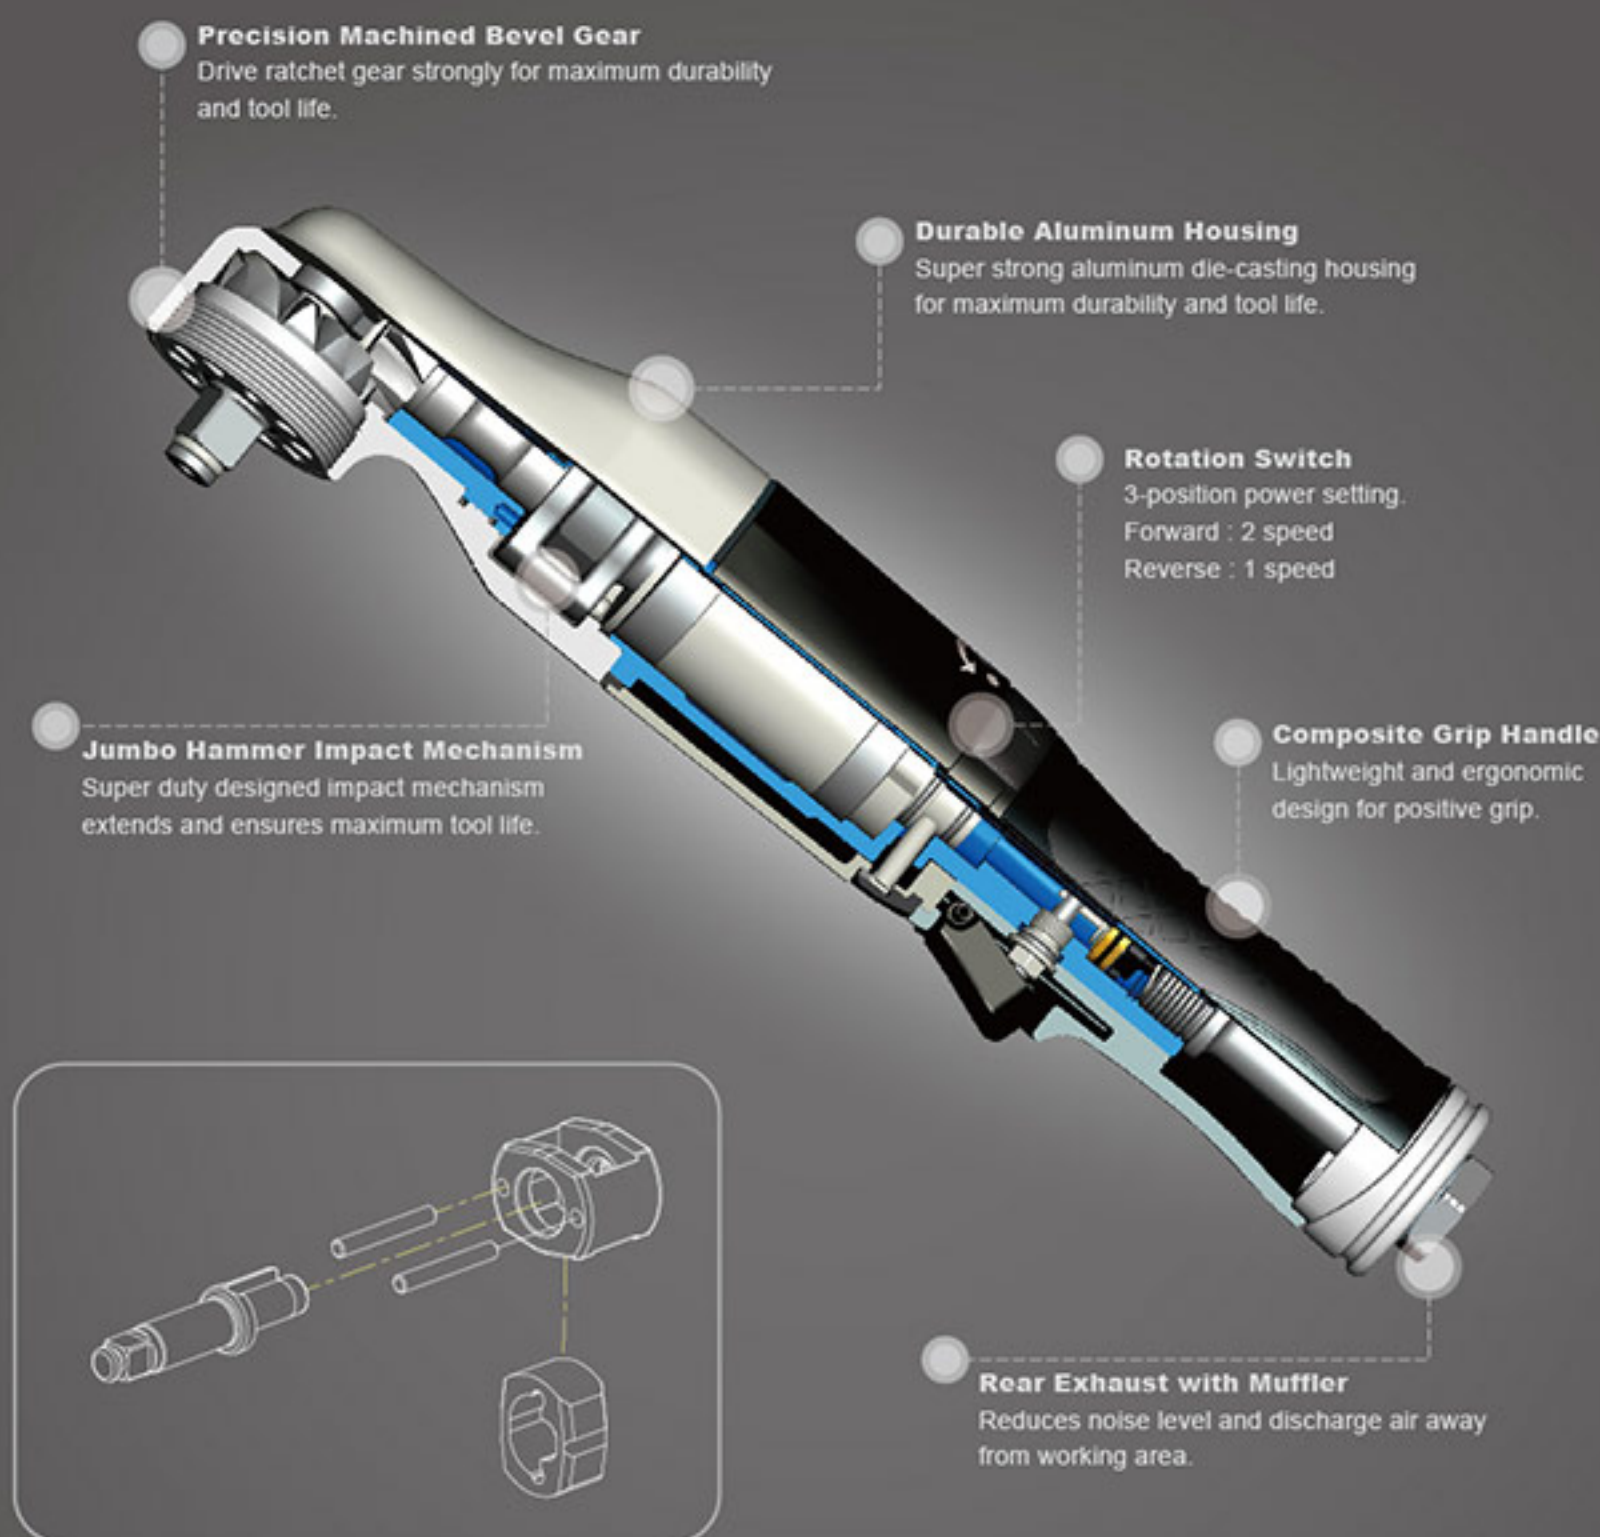

KAAH1620



1/2" DR.

ITEM NO.	KAAH1620
SPECIFICATIONS	12
Max. Torque	180 ft-lb / 244 Nm
Free Speed	7000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5.0 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	13-2/5" / 341 mm
Net Weight	3.97 lbs / 1.8 kgs

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Air Angle Impact Wrench


- Gearless Type -

- Impact Mechanism : Jumbo Hammer
- Rear Exhaust with Muffler

Protective Silicone Cover



Jumbo Hammer Impact Mechanism
Super duty designed impact mechanism extends and ensures maximum tool life.

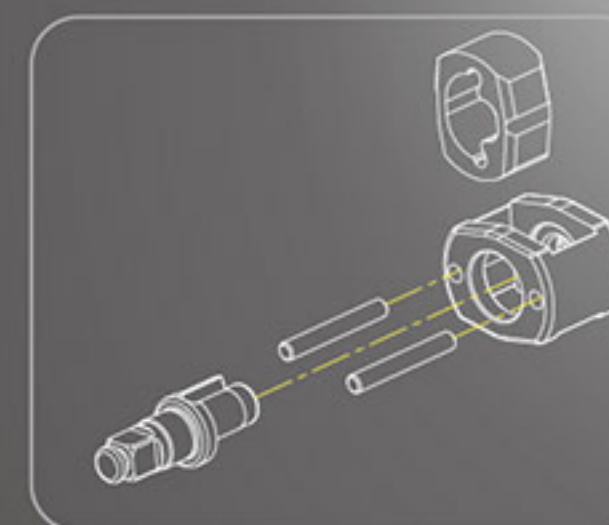

Short Barrel Model
Easier to operate in confined spaces.



360° Swivel Exhaust Deflector
Convenient to direct the air away from working area.



Power Regulator Switch
4-position power setting.
Forward : 3 speed
Reverse : 1 speed

Composite Grip Handle
Ergonomic design for positive grip.



Rotary Air Inlet
360° rotary air inlet prevents the air hose from damage.

KAAS1630



1/2" DR.

ITEM NO.	KAAS1630
SPECIFICATIONS	12
Max. Torque	300 ft-lb / 407 Nm
Free Speed	6500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.2 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	9-11/16" / 245 mm
Net Weight	3.09 lbs / 1.40 kgs

TOPTUL SUPER DUTY AIR IMPACT WRENCH SERIES

HIGH-PERFORMANCE & LIGHTWEIGHT COMPOSITE HANDLE



High quality material made durable anvil with special heat treatment



Features an adjustable 3-position forward and one full power reverse setting



POWER BY 25% MORE

TOPTUL®


HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Impact Wrench


- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler

HIGH TORQUE OUTPUT

LIGHTWEIGHT MODEL



1/2" DR.
Super Duty Air Impact Wrench



3/4" DR.
Super Duty Air Impact Wrench



Unique blade auxiliary spring and spring holder design help improve maximum torque output by 25%. High performance impact mechanism can even be started in a low pressure environment

1" DR.
Super Duty Air Impact Wrench

2200 FT-LBS



950 FT-LBS



950 FT-LBS

High Torque Output & Lightweight Model

ITEM NO.	KSAC1680
SPECIFICATIONS	4 10
Max. Torque	950 ft-lb / 1288 Nm
Working Torque	800 ft-lb / 1085 Nm
Free Speed	8500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-3/32" / 180 mm
Net Weight	3.64 lbs / 1.65 kgs

High Torque Output & Lightweight Model

ITEM NO.	KSAC2480
SPECIFICATIONS	4 10
Max. Torque	950 ft-lb / 1288 Nm
Working Torque	800 ft-lb / 1085 Nm
Free Speed	8500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-33/64" / 191 mm
Net Weight	4.08 lbs / 1.85 kgs

3/4" DR.
Super Duty Air Impact Wrench



1550 FT-LBS

1" DR.
Super Duty Air Impact Wrench



1550 FT-LBS

1" DR.
Long Anvil Super Duty Air Impact Wrench

- Impact Mechanism : Twin Hammer
- Side Exhaust
- Inside Trigger

2200 FT-LBS



One of the lightest, most powerful super duty 1" square drive extended anvil impact wrenches. Features an adjustable 3-position forward and one full power reverse setting. Auxiliary side handle for ease of control. Twin hammer mechanism promotes an even maximum force on lug nut or bolt. Applicable in the general industrial use, construction, heavy duty truck tire service works.

High Torque Output & Lightweight Model

ITEM NO.	KSAC2413
SPECIFICATIONS	6
Max. Torque	1550 ft-lb / 2102 Nm
Working Torque	1250 ft-lb / 1695 Nm
Free Speed	6000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.0 CFM
Air Inlet	3/8" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-1/2" / 216 mm
Net Weight	6.61 lbs / 3.0 kgs

High Torque Output & Lightweight Model

ITEM NO.	KSAC3213
SPECIFICATIONS	6
Max. Torque	1550 ft-lb / 2102 Nm
Working Torque	1250 ft-lb / 1695 Nm
Free Speed	6000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.0 CFM
Air Inlet	3/8" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-13/16" / 224 mm
Net Weight	6.94 lbs / 3.15 kgs

Powerful & Lightweight Model

ITEM NO.	KSAD3220
SPECIFICATIONS	2
Max. Torque	2200 ft-lb / 2983 Nm
Working Torque	2000 ft-lb / 2712 Nm
Free Speed	5500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.5 CFM
Air Inlet	1/2" PT
Min. Air Hose	1/2" I.D.
Overall Length	22-51/64" / 579 mm
Net Weight	15.87 lbs / 7.2 kgs

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Impact Wrench

- Impact Mechanism : New Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch

High-performance

Durable & Long Life Anvil

High quality material made durable anvil with special heat treatment.

New Twin Hammer Impact Mechanism

High performance and powerful designed impact mechanism extends and ensures maximum tool life.

Air Regulator

4-position power setting.

One-Hand Switch Button

Unique F/R switch design for easy one-hand operation.

End Cap Slider Guide Trigger

Easy operation design.

Composite Grip Handle

Lightweight & Ergonomic designed.

Improved Throttle Valve Seat

Easier maintenance design with less wear and prolong the life of the tool.

Rubber composite handle

Comfort & positive grip with less vibration.

Handle Exhaust with Muffler

Reduces noise level and discharge air away from working area.

Improved Air Inlet

Effectively reduces the damage of thread.

KAAJ1680

1/2" DR.
800 FT-LBS

Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ1680**

SPECIFICATIONS

Max. Torque	800 ft-lb / 1085 Nm
Free Speed	8000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	6.7 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-3/4" / 197 mm
Net Weight	5.07 lbs / 2.3 kgs

3/8" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch



Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ1240**

SPECIFICATIONS

Max. Torque	400 ft-lb / 542 Nm
Free Speed	13500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5.9 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	6" / 152 mm
Net Weight	2.69 lbs / 1.22 kgs

1/2" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch



Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ1643**

SPECIFICATIONS

Max. Torque	430 ft-lb / 583 Nm
Free Speed	13500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	5.9 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	6" / 152 mm
Net Weight	2.73 lbs / 1.24 kgs

3/4" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : New Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch



Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ2480**

SPECIFICATIONS

Max. Torque	800 ft-lb / 1085 Nm
Free Speed	8000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	6.7 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-5/16" / 211 mm
Net Weight	5.20 lbs / 2.36 kgs

3/4" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : New Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch



Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ2413**

SPECIFICATIONS

Max. Torque	1300 ft-lb / 1763 Nm
Free Speed	6000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.3 CFM
Air Inlet	3/8" PT
Min. Air Hose	1/2" I.D.
Overall Length	8-23/32" / 222 mm
Net Weight	8.2 lbs / 3.72 kgs

1" DR.

- Super Duty Air Impact Wrench
- Impact Mechanism : New Twin Hammer
- Handle Exhaust with Muffler
- One-Hand Reversing Switch



Powerful, Lightweight & Simple Operation

 ITEM NO. **KAAJ3214**

SPECIFICATIONS

Max. Torque	1400 ft-lb / 1898 Nm
Free Speed	6000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.3 CFM
Air Inlet	3/8" PT
Min. Air Hose	1/2" I.D.
Overall Length	8-15/16" / 227 mm
Net Weight	8.42 lbs / 3.82 kgs

SUPER DUTY AIR IMPACT WRENCH (Limit Forward Working Torque)

- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler
- Ideal for automotive tire service
- Limited Torque : 90 Nm / Max. Reverse Torque : 814 Nm


1/2" DR.
66 FT-LBS

Limit Forward Working Torque

 ITEM NO. **KAAM1606**

SPECIFICATIONS

Max. For. Torque	66 ft-lb / 90 Nm
Free For. Speed	2000 RPM
Max. Rev. Torque	600 ft-lb / 814 Nm
Free Rev. Speed	8000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4.4 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-19/32" / 193 mm
Net Weight	4.73 lbs / 2.15 kgs


Ideal for Automotive tire service

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Impact Wrench

- Impact Mechanism : Twin Hammer
- Handle Exhaust with Muffler

High-performance

Durable & Long Life Anvil
High quality material made durable anvil with special heat treatment.

Twin Hammer Impact Mechanism
Well-balanced design impact mechanism. Powerful and high torque output.

POWERFUL DESIGN
LIGHT WEIGHT

Air Regulator
4-position power setting.
Forward: 3 speed
Reverse: 1 speed


End Cap Slider Guide Trigger
Easy operation design.

Composite Grip Handle
Lightweight & Ergonomic designed.

Rubber composite handle
Comfort & positive grip with less vibration.

Improved Air Inlet
Effectively reduces the damage of thread.

Handle Exhaust with Muffler
Reduces noise level and discharge air away from working area.

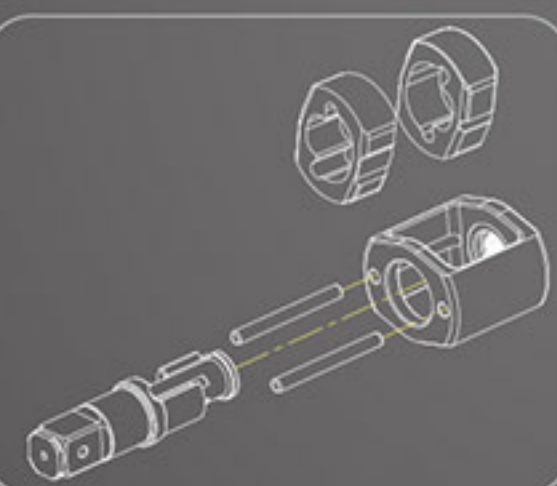

KAAC1610



1/2" DR.

1000 FT-LBS

Powerful & Lightweight Model

ITEM NO.	KAAC1610	
SPECIFICATIONS		
Max. Torque	1000 ft-lb / 1356 Nm	8
Free Speed	9500 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	7.3 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	7-1/2" / 190 mm	
Net Weight	5.07 lbs / 2.3 kgs	

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Super Duty Air Impact Wrench

- Impact Mechanism : Jumbo Hammer
- Handle Exhaust with Muffler

High-performance


Short Barrel Model
Easier to operate in confined spaces.

Jumbo Hammer Impact Mechanism
Super duty designed impact mechanism extends and ensures maximum tool life.

Air Regulator
4-position power setting.
Forward: 3 speed
Reverse: 1 speed

Composite Grip Handle
Lightweight & Ergonomic designed.

Handle Exhaust with Muffler
Reduces noise level and discharge air away from working area.

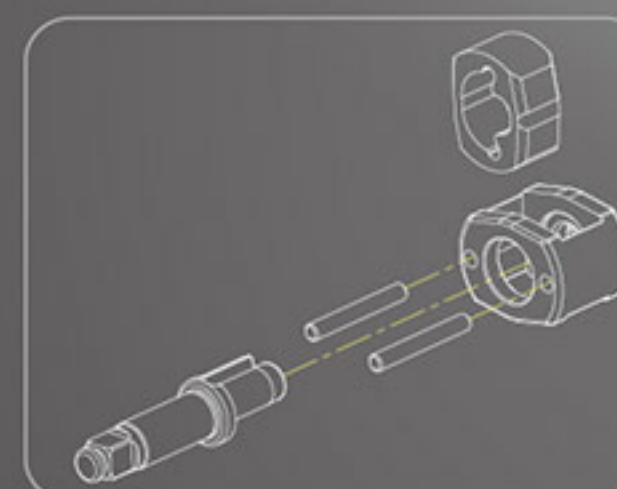

KAAC1645



1/2" DR.

450 FT-LBS

Powerful, Lightweight & Short Barrel Model

ITEM NO.	KAAC1645	
SPECIFICATIONS		
Max. Torque	450 ft-lb / 610 Nm	12
Free Speed	9600 RPM	
Air Pressure	90 PSI / 6.2 BAR	
Air Consumption	4.9 CFM	
Air Inlet	1/4" PT	
Min. Air Hose	3/8" I.D.	
Overall Length	5-45/64" / 145 mm	
Net Weight	3.48 lbs / 1.58 kgs	

3/4" DR.

Super Duty Air Impact Wrench
• Impact Mechanism: Twin Hammer
• Side Exhaust with Muffler
• Inside Trigger



Features an adjustable 3-position forward and reverse power setting. Auxiliary side handle for ease of control. Rubber comfort grips on side & back handle.

Powerful & Lightweight Model

ITEM NO.	KAAC2416
SPECIFICATIONS	
Max. Torque	1600 ft-lb / 2170 Nm
Free Speed	5500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	8.5 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	12-19/32" / 320 mm
Net Weight	12.54 lbs / 5.69 kgs

1" DR.

Super Duty Air Impact Wrench
• Impact Mechanism: Twin Hammer
• Handle Exhaust with Muffler



Features an adjustable 3-position forward and one full power reverse setting. Auxiliary rubber comfort grip side handle for ease of control.

ITEM NO.	KAAC3218
SPECIFICATIONS	
Max. Torque	1800 ft-lb / 2441 Nm
Free Speed	5000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9.0 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	10-13/16" / 275 mm
Net Weight	15.92 lbs / 7.22 kgs

1" DR.

Long Anvil Super Duty Air Impact Wrench
• Impact Mechanism: Twin Hammer
• Side Exhaust with Muffler
• Inside Trigger



One of the lightest, most powerful super duty 1" square drive extended anvil impact wrenches. Ultimate torque of 2,000 ft-lbs. at 90 psi. Weighs only 18.34 lbs. Designed for extended use in heavy duty truck tire service works. Twin hammer mechanism promotes an even maximum force on lug nut or bolt. Features an adjustable 3-position forward and reverse power setting. Auxiliary side handle for ease of control. Rubber comfort grips on side & back handle.

Powerful & Lightweight Model

ITEM NO.	KAAD3220
SPECIFICATIONS	
Max. Torque	2000 ft-lb / 2712 Nm
Free Speed	5000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	9 CFM
Air Inlet	1/2" PT
Min. Air Hose	3/4" I.D.
Overall Length	19-31/64" / 495 mm
Net Weight	18.34 lbs / 8.32 kgs

1" DRIVE
LONG ANVIL SUPER
DUTY AIR IMPACT WRENCH

Air Straight Die Grinder

Professional Grade Air Tools
• Powerful 0.6 HP straight-line die grinder for heavy duty applications
• Includes two collet chucks: 6mm (Insert) & 1/4"
• Adjustable power regulator for precise control
• Safety lock lever to prevent accidental start-up
• Rear exhaust with muffler directs air away from the workpiece
• Suited for grinding, polishing, burnishing and deburring applications



ITEM NO.	KAKA0822
SPECIFICATIONS	
Collet Chuck	6mm / 1/4"
Power	0.6 HP / 0.45 KW
Free Speed	22000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	6 CFM
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	6-9/16" / 167 mm
Weight	1.3 lbs / 0.6 kgs

Air Micro Die Grinder

• Includes two collet chucks: 3mm (Insert) & 1/8"
• Adjustable power regulator for precise control
• Rear exhaust with hose
• High quality bearings for smooth and powerful operation
• Suited for grinding, polishing, burnishing and deburring applications



ITEM NO.	KAKB0456
SPECIFICATIONS	
Collet Chuck	3mm / 1/8"
Power	0.05 HP / 0.04 KW
Free Speed	56000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	3.5 CFM
Air Inlet	1/4" PT
Air Hose	13/64" I.D.
Overall Length	5-15/32" / 139 mm
Net Weight	0.44 lbs / 0.2 kgs

Mini Air Straight Die Grinder

• Includes two collet chucks: 6 mm (pre-inserted) & 1/4"
• Mini design for working in confined areas
• Safety lock throttle lever to prevent accidental start-up
• Suited for grinding, polishing, burnishing and deburring applications
• Rear Exhaust



ITEM NO.	KASA0825
SPECIFICATIONS	
Collet Chuck	6 mm & 1/4"
Power	0.3 HP / 0.224 KW
Free Speed	25000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	3 CFM / 84 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	4-17/32" / 115 mm
Net Weight	0.64 lbs / 0.29 kgs

Mini Air Angle Die Grinder

• Includes two collet chucks: 6 mm (pre-inserted) & 1/4"
• Specific mini and 90° angled design for reaching confined spaces easier
• Safety lock throttle lever to prevent accidental start-up
• Suited for grinding, polishing, burnishing and deburring applications
• Rear Exhaust



ITEM NO.	KASD0818
SPECIFICATIONS	
Collet Chuck	6 mm & 1/4"
Power	0.3 HP / 0.224 KW
Free Speed	18000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	3 CFM / 84 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	4-15/16" / 125 mm
Net Weight	0.95 lbs / 0.43 kgs

TOPTUL

Mini Air Tools Series

Lightweight and Powerful,
High-Speed Rotation



2.5" Mini Air Angle Grinder

• Multi-functional angle grinder suitable for cutting, grinding, polishing, paint removal, rust removal and etc.
• Lightweight and powerful, high-speed rotation, quick cutting or grinding
• Adjustable protective steel wheel guard
• Safety lock throttle lever to prevent accidental start-up
• Rear Exhaust



• Grinding wheel not included

Powerful & Lightweight Model

ITEM NO.	KASC0318
SPECIFICATIONS	
Grinding Wheel Dia. x Arbor Hole	2-1/2" x 3/8" (60 x 9.5 mm)
Power	0.3 HP / 0.224 KW
Free Speed	18000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	3 CFM / 84 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	5-1/8" / 130 mm
Net Weight	1.17 lbs / 0.53 kgs
Sound Pressure Level	81.5 dB(A)
Vibration Level	2.5 M/Sec²

Heavy Duty Air Angle Grinder

• Multifunctional angle grinder suitable for cutting, grinding, polishing, paint removal, rust removal and etc.
• Adjustable protective steel wheel guard
• Safety lock throttle lever to prevent accidental start-up
• Ergonomic side handle for ease of use and comfort
• Front Exhaust



ITEM NO.	KAKC0595B
SPECIFICATIONS	
Grinding Wheel Dia. x Arbor Hole	5" x 7/8" (125 x 22 mm)
Power	0.8 HP / 0.59 KW
Free Speed	11000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	6 CFM / 169 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	9" / 230 mm
Net Weight	3.96 lbs / 1.8 kgs
Sound Pressure Level	89 dB(A)
Vibration Level	5.9 M/Sec²


TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

3-IN-1 Super Duty Orbital Air Sander

- Rear Exhaust with muffler
- Brand new design 3-in-1 Vacuum Modes - Non-vacuum, Central Vacuum, Self vacuum modes
- High & Low speed control allows users to easily adjust speed for different applications
- Excellent design to obtain a low center of gravity and ensure a better control and precision during all phases of the sanding process
- Alternatively capable for equipping with dust bag or industrial vacuum cleaner
- Ideal for grinding construction steel, metals and wood
- Orbital diameter
 2.5 mm - Fine finish eccentric sander with dust extraction
 5 mm - General sanding eccentric sander with dust extraction

KAMA SERIES

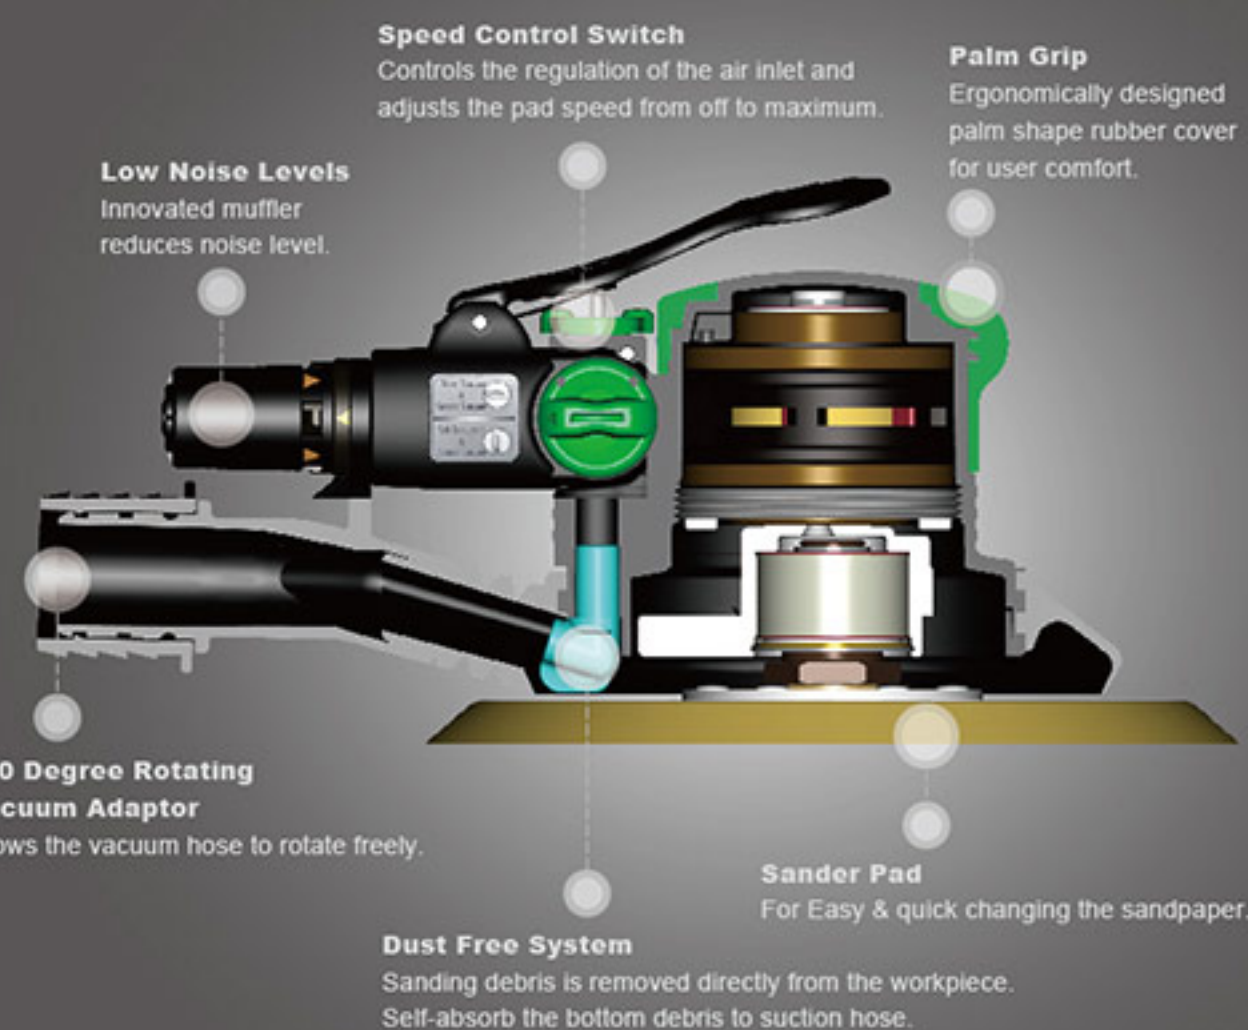

Sanding Pad (Vacuum Type)



KALE0501

KALE0601

ITEM NO.	Pad Size (inch)	Holes	Thread Size (UNF)	Max. Pad Speed (R.P.M)	Applied ITEM NO.	5	20
KALE0501	5"	5	5/16"-24	12000	KAMA0503, KAMA0505	5	20
KALE0601	6"	6	5/16"-24	12000	KAMA0603, KAMA0605	5	20

3-IN-1

Super Duty Orbital Air Sander


5" PAD SIZE - 2.5mm

ITEM NO.	KAMA0503
SPECIFICATIONS	8
Pad Size	5" (127 mm)
Spindle Thread	5/16"-24 UNF
Orbital Diameter	2.5 mm
Free Speed	10000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-1/4" / 184 mm
Net Weight	1.69 lbs / 0.77 kgs

3-IN-1

Super Duty Orbital Air Sander


5" PAD SIZE - 5mm

ITEM NO.	KAMA0505
SPECIFICATIONS	8
Pad Size	5" (127 mm)
Spindle Thread	5/16"-24 UNF
Orbital Diameter	5 mm
Free Speed	10000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	7-1/4" / 184 mm
Net Weight	1.69 lbs / 0.77 kgs

3-IN-1

Super Duty Orbital Air Sander


6" PAD SIZE - 2.5mm

ITEM NO.	KAMA0603
SPECIFICATIONS	8
Pad Size	6" (152 mm)
Spindle Thread	5/16"-24 UNF
Orbital Diameter	2.5 mm
Free Speed	10000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-7/8" / 225 mm
Net Weight	1.69 lbs / 0.77 kgs

3-IN-1

Super Duty Orbital Air Sander


6" PAD SIZE - 5mm

ITEM NO.	KAMA0605
SPECIFICATIONS	8
Pad Size	6" (152 mm)
Spindle Thread	5/16"-24 UNF
Orbital Diameter	5 mm
Free Speed	10000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	7.5 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	8-7/8" / 225 mm
Net Weight	1.69 lbs / 0.77 kgs

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL



Super Duty Mini Butterfly Type Air Screwdriver

- Impact Mechanism : Twin Dog Clutch
- Side Exhaust with Muffler
- Quick Change Hexagonal Female

High-performance

MINI
DESIGN

LIGHT
WEIGHT

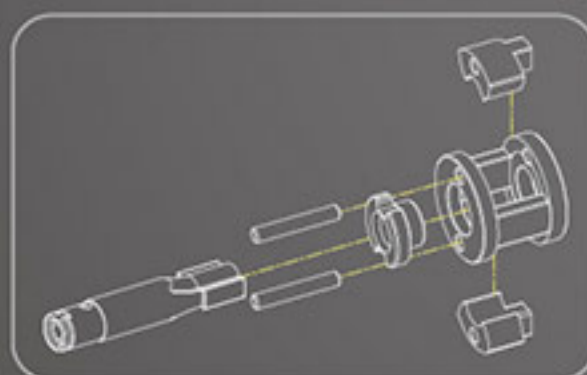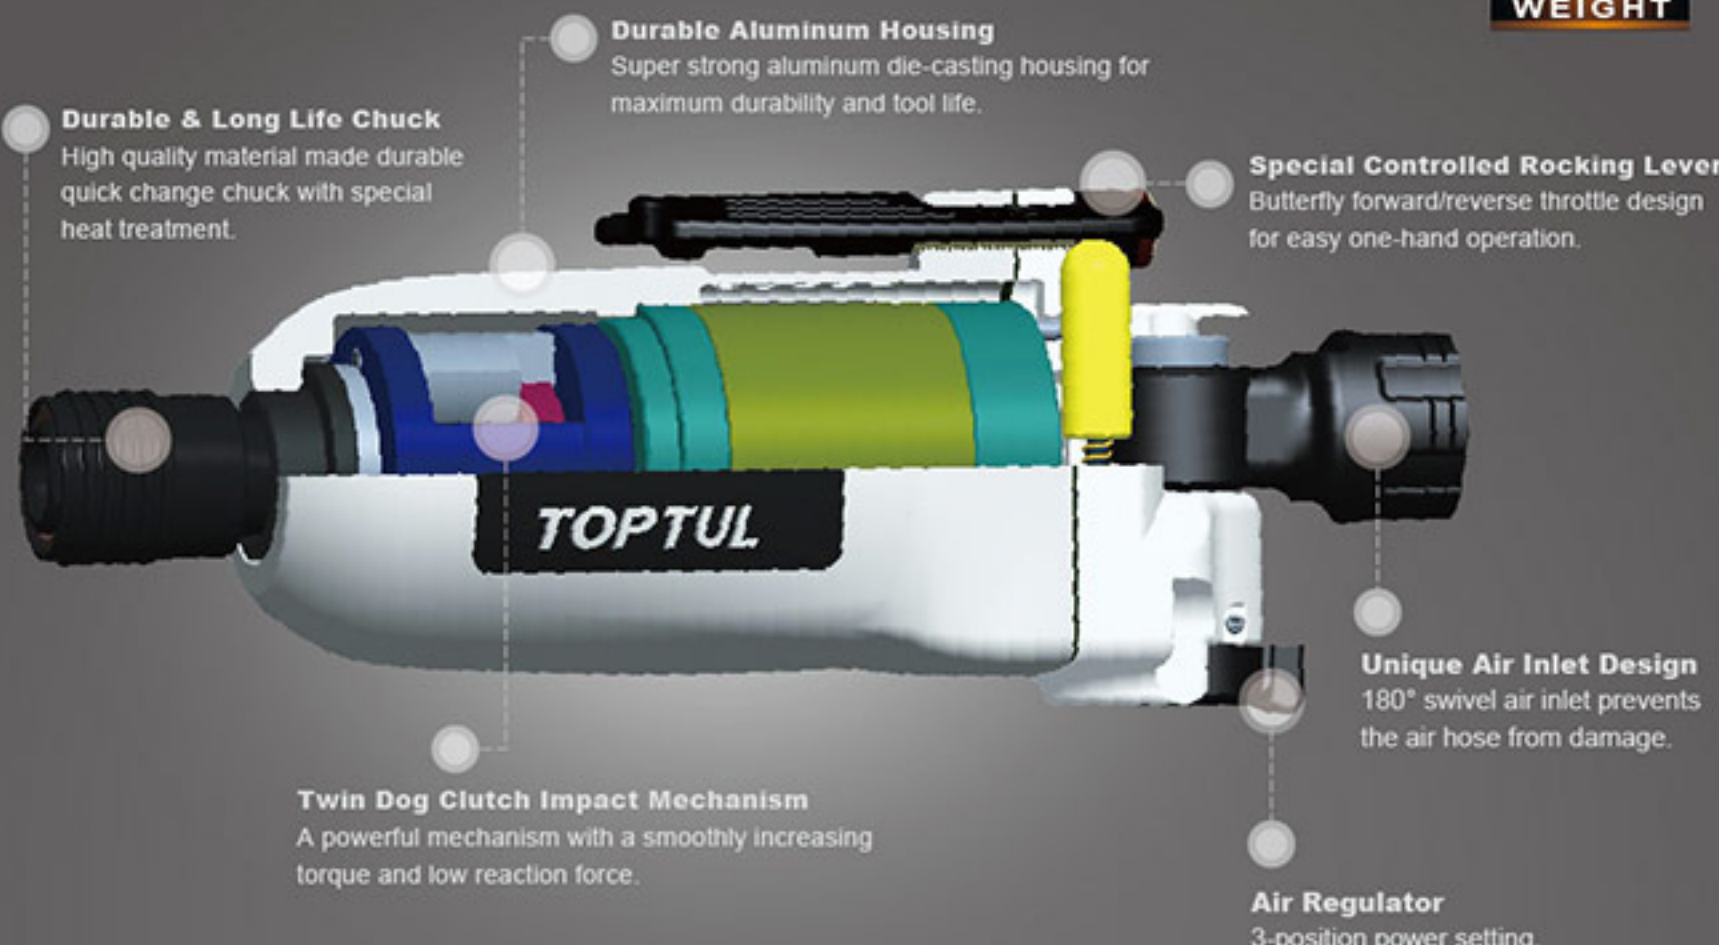

Bits Type:



Chuck designed for European type of bits

KSAU0808



1/4" Hex.

80
FT-LBS

• Powerful, Lightweight & Mini Model

ITEM NO.	KSAU0808
SPECIFICATIONS	
Max. Torque	80 ft-lb / 108 Nm
Free Speed	12000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	2.1 CFM
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Overall Length	5-23/32" / 146 mm
Net Weight	1.21 lbs / 0.55 kgs

Reversible Air Drill, 10 mm (3/8") Keyless Chuck

- Ideal for drilling, honing, reaming and hole sawing
- Side forward/reverse switch allowing one hand operation for easy usage
- Progressive trigger mechanism for better control of drilling speed
- 360° swivel air inlet prevents the air hose from damage
- Quick-change keyless chuck for fast and easy changing of drill bits
- Anti-slip contoured elastomer comfortable grip handle



ITEM NO.	KAQA1220
SPECIFICATIONS	
Chuck Size	10 mm (3/8")
Power	0.5 HP / 0.37 KW
Free Speed	2000 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM / 113 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	210 mm / 8-1/4"
Net Weight	1.8 lbs / 0.8 kgs
Sound Pressure Level	91 dB(A)
Vibration Level	0.2 M/Sec²

Reversible Air Drill, 13 mm (1/2") Keyless Chuck

- Ideal for drilling, honing, reaming and hole sawing
- Side forward/reverse switch allowing one hand operation for easy usage
- Progressive trigger mechanism for better control of drilling speed
- 360° swivel air inlet prevents the air hose from damage
- Quick-change keyless chuck for fast and easy changing of drill bits
- Anti-slip contoured elastomer comfortable grip handle
- Ergonomic, auxiliary side handle for increased control



ITEM NO.	KAQA1650
SPECIFICATIONS	
Chuck Size	13 mm (1/2")
Power	0.5 HP / 0.37 KW
Free Speed	500 RPM
Air Pressure	90 PSI / 6.2 BAR
Air Consumption	4 CFM / 113 l/min
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Overall Length	265 mm / 10-1/2"
Net Weight	2.7 lbs / 1.2 kgs
Sound Pressure Level	92 dB(A)
Vibration Level	0.2 M/Sec²

Heavy Duty Air Impact Hammer

- Pressure die cast Aluminum Alloy body with hardened tool steel impact mechanism
- Close tolerance of internal parts provides high torque performance and low air consumption
- Medium-barrel hammer design with pistol grip handle
- Front Exhaust



ITEM NO.	KAHA3217
SPECIFICATIONS	
Blow Per Minute	3200 BPM
Piston Stroke	67mm (2-5/8")
Chisel Shank Opening (Hex)	10 mm
Overall Length	171 mm (6-3/4")
Net Weight	1.6 kg (3.5 lbs)
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Air Pressure	90 PSI / 6.2 BAR
Average Air Consumption	10 CFM (283 l/min)
Sound Pressure Level	104.22 dB(A)
Sound Power Level	115.21 dB(A)
Vibration Level	13.51 M/Sec²

Spot Weld Breaker

ITEM NO.	Hex(mm)	L(mm)		
KAJA18C1	10	178	10	120

Flat Chisel

ITEM NO.	Hex(mm)	L(mm)		
KAJA18A1	10	178	10	120

Sheet Metal Trimmer

ITEM NO.	Hex(mm)	L(mm)		
KAJA18B1	10	178	10	120

Taper Punch

ITEM NO.	Hex(mm)	L(mm)		
KAJA18E1	10	178	10	120

/// Air Pistol Grip Needle Scaler

- Suitable for surface preparation work involving the cleaning or removal of paint, rust, dirt or weld slag
- Adjustable needle cover enables maximum utilization of needles
- Heat treated piston and cylinder ensure excellent durability and long service life
- Fitted with 19 needles of Ø3 mm
- Optional attachment for 29 needles of Ø2 mm

ITEM NO.	KAHB3718
SPECIFICATIONS	6
Blow Per Minute	3700 BPM
Piston Stroke	33.5 mm (1-5/16")
Overall Length	330 mm (13")
Net Weight	2.7 kg (6 lbs)
Needle Diameter	Ø3x180 mm
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Air Pressure	90 PSI / 6.2 BAR
Average Air Consumption	3.0 CFM (85 l/min)
Sound Pressure Level	98 dB(A)
Sound Power Level	109 dB(A)
Vibration Level	18.1 M/Sec²



/// Air Needle Scaler

- Suitable for surface preparation work involving the cleaning or removal of paint, rust, dirt or weld slag
- Axial design allows easy access to confined spaces
- Heat treated piston and cylinder ensure excellent durability and long service life
- Fitted with 12 needles of Ø3 mm

ITEM NO.	KAHC5013
SPECIFICATIONS	10
Blow Per Minute	5000 BPM
Piston Stroke	28 mm (1-3/32")
Overall Length	295 mm (11-9/16")
Net Weight	1.3 kg (2.9 lbs)
Needle Diameter	Ø3x125 mm
Air Inlet	1/4" PT
Air Hose	3/8" I.D.
Air Pressure	90 PSI / 6.2 BAR
Average Air Consumption	1.7 CFM (48 l/min)
Sound Pressure Level	94 dB(A)
Sound Power Level	105 dB(A)
Vibration Level	9.84 M/Sec²



Air Windshield Cutter & Blades

/// Air Windshield Cutter W/Hose

- Quickly and easily cuts windscreens and other glued parts
- Safety lock lever to prevent accidental start-up
- Integral regulator for speed control
- Flexible blade mount can be positioned in 12 different ways
- For one handed operation with ergonomic design
- Rear exhaust drives air away from the workplace
- Includes one straight offset blade (ITEM NO. KAJC54A1) and a 3/16" allen wrench



ITEM NO.	KBHA0120
SPECIFICATIONS	10
Oscillations / Minute	20,000
Stroke Arc	2°
Overall Length	7-11/16" / 195 mm
Net Weight	2.14 lbs / 0.97 kgs
Air Inlet	1/4" PT
Min. Air Hose	3/8" I.D.
Air Pressure	90 PSI / 6.2 BAR
Average Air Consumption	4.0 CFM / 113 l/min
Sound Pressure Level	80 dB(A)
Sound Power Level	91 dB(A)
Vibration Level	14 M/Sec²

**PERFECT FOR AUTO GLASS
CUT OUT APPLICATIONS**



BLADE SERIES

/// Scraper Blade

- Made of polished Stainless Steel



ITEM NO.	L(mm)		
KAJC45C1	45	30	120

/// Straight Offset Blade

- Made of polished Stainless Steel



ITEM NO.	L(mm)		
KAJC54A1	53.5	20	80

/// Hooked Blade

- Made of polished Stainless Steel



ITEM NO.	L(mm)		
KAJC21B1	20.5	20	80



TOPTUL
Provides a variety of optional
blades to improve the application
of the tool in the workshop

/// Hooked Blade

- Made of polished Stainless Steel



ITEM NO.	L(mm)		
KAJC38B1	38	20	80

/// Hooked Blade

- Made of polished Stainless Steel



ITEM NO.	L(mm)		
KAJC62B2	61.5	20	80

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Air Hydraulic Riveter

Professional Grade Air Tools

BASIC MODEL

- Suitable for Aluminum/Steel & Stainless Steel rivets
- Designed for professional riveting and continuous operation
- Robust aluminum alloy oil cylinder and air cylinder bodies
- Oil leakage and air leakage free model, ideal for both light and heavy duty production requirements
- Set includes 4 interchangeable standard nosepieces, rivet mandrel collector, two service combination wrenches and brush



Rivet Diameter	Rivet Material		
	Aluminum	Steel	Stainless Steel (Inox)
2.4mm or 3/32"	●	●	●
3.0/3.2mm or 1/8"	●	●	●
4.0mm or 5/32"	●	●	●
4.8/5.0mm or 3/16"	●	●	●

ITEM NO.	KARA0205B
SPECIFICATIONS	10
Rivet Diameter	2.4, 3.0/3.2, 4.0, 4.8/5.0 mm or 3/32", 1/8", 5/32", 3/16"
Stroke Length	16mm
Traction Power	9000 N / 2000 lbf
Air Pressure	80-95 PSI (5.5-6.5 BAR)
Air Consumption Per Rivet	0.07 CFR / 2.1 LPR
Air Inlet	1/4" PT
Min. Air Hose	5/16" I.D.
Overall Length	10-11/16" / 272mm
Net Weight	3.76 lbs / 1.71 kgs



Air cylinder end cap with patented rivet size hole gauge design

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Air Hydraulic Riveter

Professional Grade Air Tools

- Suitable for Aluminum/Steel & Stainless Steel rivets
- Designed for professional riveting and continuous operation
- Twin air inlet design allows easy operation by right-handed or left-handed users
- New spent mandrel container to protect operator's eyes and keep working places clean
- Shock-reducer design to minimize hand fatigue
- Noise silencer design for working pleasure
- Smart nosepieces storage design to avoid losing nosepieces
- Oil refill hole design for quickly refilling the shortage of hydraulic oil
- Set includes rivet mandrel collector, two combination wrenches, brush, hydraulic oil injector without oil and one set of extra jaws



Rivet Diameter	Rivet Material		
	Aluminum	Steel	Stainless Steel (Inox)
2.4mm or 3/32"	●	●	●
3.0/3.2mm or 1/8"	●	●	●
4.0mm or 5/32"	●	●	●
4.8/5.0mm or 3/16"	●	●	●

ITEM NO.	KARA0205
SPECIFICATIONS	10
Rivet Diameter	2.4, 3.0/3.2, 4.0, 4.8/5.0 mm or 3/32", 1/8", 5/32", 3/16"
Stroke Length	18mm
Traction Power	9000 N / 2000 lbf
Air Pressure	80-95 PSI (5.5-6.5 BAR)
Air Consumption Per Rivet	0.08 CFR / 2.4 LPR
Air Inlet	1/4" PT
Min. Air Hose	5/16" I.D.
Overall Length	10-5/8" / 270mm
Net Weight	3.92 lbs / 1.78 kgs



Air cylinder end cap with rivet size hole gauge and nosepieces storage design

TOPTUL®

HIGH QUALITY PNEUMATIC TOOL

Heavy Duty Air Hydraulic Riveter

Professional Grade Air Tools

- Suitable for Aluminum/Steel & Stainless Steel rivets
- Designed for professional riveting and continuous operation
- Twin air inlet design allows easy operation by right-handed or left-handed users
- New spent mandrel container to protect operator's eyes and keep working places clean
- Shock-reducer design to minimize hand fatigue
- Noise silencer design for working pleasure
- Smart nosepieces storage design to avoid losing nosepieces
- Oil refill hole design for quickly refilling the shortage of hydraulic oil
- Set includes rivet mandrel collector, two combination wrenches, brush, hydraulic oil injector without oil and one set of extra jaws



Rivet Diameter	Rivet Material		
	Aluminum	Steel	Stainless Steel (Inox)
3.0/3.2mm or 1/8"	●	●	●
4.0mm or 5/32"	●	●	●
4.8/5.0mm or 3/16"	●	●	●
6.0mm	●	●	●
6.4mm or 1/4"	●	●	●

ITEM NO.	KARA0306		
SPECIFICATIONS			
Rivet Diameter	3.0/3.2, 4.0, 4.8/5.0, 6.0, 6.4 mm or 1/8", 5/32", 3/16", 1/4"		
Stroke Length	15.8mm		
Traction Power	14700 N / 3300 lbf		
Air Pressure	85~100 PSI (5.9~6.9 BAR)		
Air Consumption Per Rivet	0.11 CFR / 3.1 LPR		
Air Inlet	1/4" PT		
Min. Air Hose	3/8" I.D.		
Overall Length	10-13/16" / 275mm		
Net Weight	4.65 lbs / 2.11 kgs		



Air cylinder end cap with rivet size hole gauge and nosepieces storage design

HVLP Gravity Feed Spray Gun

- Highly efficient HVLP design complies with environmental regulation requiring high volume, low pressure, saving materials and very lower over-spray
- Professional gravity feed spray gun with 1.4 mm set-up, ideal for applying top coats
- Air and paint flow control device for fine adjustment of spray flow
- Round/flat fan control allows spray pattern to be adjusted for any job
- Brass air cap with stainless steel needle and nozzle suitable for most coatings



Contents:
1PC HVLP Gravity Feed Spray Gun
1PC Nylon Gravity Cup
1PC Multifunctional Wrench
1PC Cleaning Brush
1PC Paint Filter

ITEM NO.	KANA14N6		
SPECIFICATIONS		 10	
Feed Type	Gravity		
Cup Capacity	600 ml		
Standard Nozzle	1.4 mm		
Optional Nozzle	1.0, 1.2, 1.3, 1.4, 1.5, 1.6, 1.8, 2.0, 2.5 mm		
Fluid Output	150 ml/min		
Pattern Width	310 mm		
Working Pressure	15 - 28 PSI / 1.03 - 1.93 BA		
Air Consumption	12 CFM		
Air Inlet	1/4" PF		
Gun Weight	1.13 lbs / 514 g		

Nylon Gravity Cup

- Capacity: 600 ml
- Material: Nylon
- Use with TOPTUL KANA14N6 (HVLP Gravity Feed Spray Gun)



ITEM NO.	Capacity	Fluid Inlet	
KALN0160	600 ml	M16x1.5P	20

17PCS Spray Gun Cleaning Set



ITEM NO.	GDAR1701	12 (SET)	72 (SET)
----------	----------	----------	----------

- Various sized brushes and needles can be used with all types of paint thinners and spray gun cleaning solvents
- Ideal for cleaning all types of suction tube, gravity feed, detail, touch up and pressure spray guns
- Set includes:
12 mm Pick Up Tube Brush (L=305 mm)
12 mm Body Cavity Brush (L=235 mm)
10 mm Body Cavity Brush (L=155 mm)
8 mm HVLP Brush (L=160 mm)
Single-End Detail Brush
Nylon Bristle Brush
5PCS Miniature Brush (Ø2, 2.5, 3, 4, 5 mm)
6PCS Precision Needle (Ø0.5, 0.8, 1.0, 1.2, 1.4, 1.6 mm)

Air Inlet Nipple



ITEM NO.	Thread	L(mm)	Material	Type		
KALC081E	1/4" PT (Male)	33.4	Brass	EU	20	360
KALC082J	1/4" PT (Male)	40	Steel	JP	20	360

Mini Oiler

- For automatic oiling of compressed air tools
- Extends the service life of pneumatic tools
- Compact design and refillable
- Solid brass construction
- Air Inlet & Outlet Thread: 6.3mm (1/4")
- Filling Capacity: 5 c.c.



ITEM NO.	SIZE	L(mm)		
KALA0815	1/4" PT	54	20	80



SPRAY GUN CLEAN

Air Hose Reel

- Robust metal case for heavy-duty applications
- Polyurethane Braid Hose can be extended and retracted by simple pull and release mechanism
- Automatic rewind hose reel with SK5 spring steel spring provides easy locking and retracting of hose
- Built-in 16 teeth multi-position ratchet gear lock system for securing hose at desired length and ensures maximum safety and reliability
- Movable retaining ball allows easy adjustment of leader hose to desired length
- Quickly and easily replaceable air hose design
- Supplied with swivel metal mounting bracket for fixing to wall or ceiling
- Max. Working Pressure: 300 PSI
- Working Temperature: -10°C to 65°C


HEAVY DUTY
Metal Case

MULTI GEAR
Ratchet Lock

• KHAP0810E ~ 1012E

• KHAP1015E & 1020E

• Built-in 16 teeth ratchet mechanism

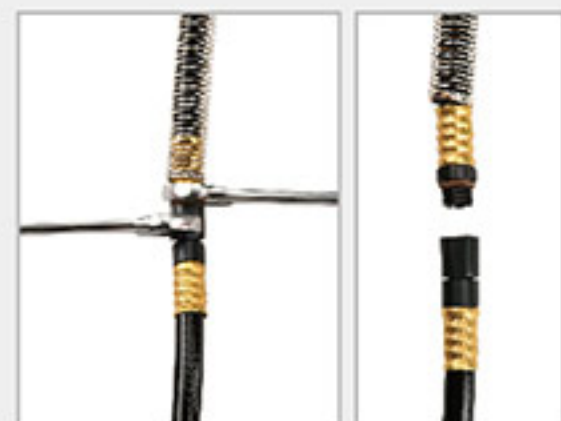

• Disassemble & replace the connection air hose

ITEM NO.	Hose I.D. (mm)	Hose O.D. (mm)	Hose Length (M)	Coupler Type	Air Inlet / Outlet	1	2
KHAP0810E	8	12	10	EU	1/4" PT	1	2
KHAP0815E	8	12	15	EU	1/4" PT	1	2
KHAP1010E	9.5	13.5	10	EU	1/4" PT	1	2
KHAP1012E	9.5	13.5	12	EU	1/4" PT	1	2
KHAP1015E	9.5	13.5	15	EU	1/4" PT	1	2
KHAP1020E	9.5	13.5	20	EU	1/4" PT	1	2

Impact Wrench Display Stand

- Made of drop forged Aluminum Alloy Steel
- With SNCM connector
- Ideal for representing air impact wrenches



ITEM NO.	SIZE (W)x(D)x(H)mm	Outlet Thread	1
KALF1712	170x120x60	1/4" - 19PT	30



• Not included air tool with coupler and plug connector



TOPTUL
AIR HOSE REEL

Professional
Tools



234

HEXAGON & STAR KEYS SERIES

Practical allen and star key wrenches for screw fastening and unfastening works.

